


## AIR CANAL GVSE

Air Canal used for separating strange materials lighter than cereals by air. Air canal provides optimum productivity for separating light weight grains in other words, cereal, soy bean, peanut, legumes, etc. It can be mounted behind the machines such as garbage separator and scouter and since the number of layer is not many, it offers great advantage for the plants. It provides optimum working efficiency. This stage has great advantages in factory, which has lower floor numbers.

Product flowing has widespread and smoothly by vibrated movement of feed board where has the wideness of the canal in entrance of the product section. Thus, product spreads as required density. Advantage of the back current is movement of all along the canal, canal section has setting in respect flow of desire by the help of fixing bolts. Air velocity setting in canal sensitively. Thus, light grains which in the cereals decomposed as to desire. It has a universal use for all kinds of fluids. It can be fixed to central aspiration system.

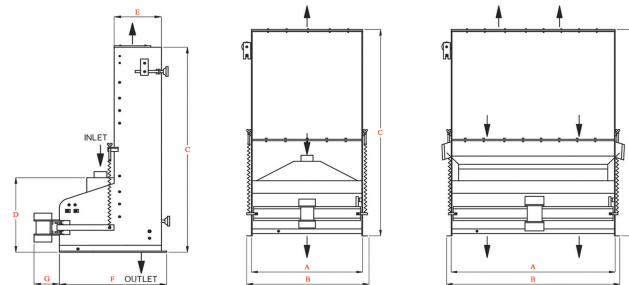

TYPE	DIMENSIONS (mm)							Capacity (t/h)		Aspiration m <sup>3</sup> /min		MOTOR			Approx Weight Kg		
	A	B	C	D	E	F	G	1.Cleaning	2. Cleaning	1.Cleaning	2.Cleaning	CEI Standart	Kw	rpm	Net	Gross	Package m <sup>3</sup>
50	500	585	1455	430	222	612	1250	26	6	36	22	BM 90/15	0,05	1500	75	115	1,45
75	750	835	1455	555	222	612	1355	40	9	54	34	BM 90/15	0,05	1500	95	130	2,1
100	1000	1085	1455	680	322	712	2525	66	16	90	56	BM 90/15	0,05	1500	130	195	2,9
150	1500	1585	1455	680	322	712	2525	100	24	135	84	BM 90/15	0,05	1500	145	215	4,30



**GPS-ASCOM**

**GPS**  
ASCOM MAKINA SAN. Tic.Ltd. Şti.  
Manufacturing Production Lines