
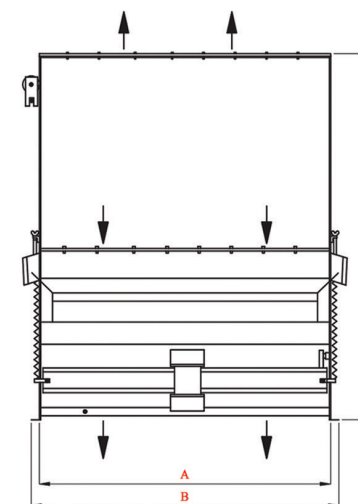
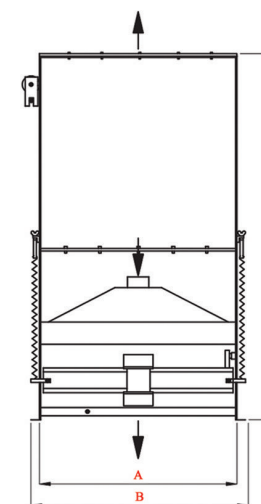


Air canal is used for separating strange material lighter than coffee beans by air. Air canal provides optimum productivity for separating light weight coffee beans, cereal, soy beans, peanut, legumes etc. It can be mounted behind the machines such as garbage separator and scourer and since the number of layers is not many. It offers a great advantage of the plants. it provides optimum working efficiency.

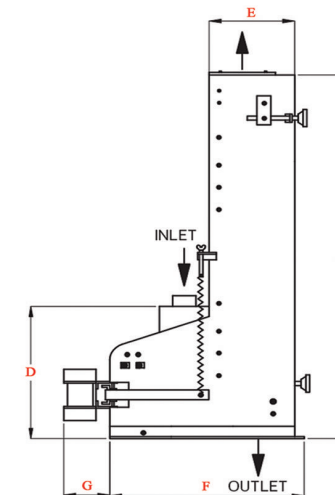

TYPE G VSE	DIMENSIONS (mm)							Capaci (t/h)		Aspiration m ³ /min		MOTOR			Approx Weight Kg		
	A	B	C	D	E	F	G	1.Cleaning	2. Cleaning	1.Cleaning	2.Cleaning	CEI Standart	Kw	rpm	Net	Gross	Package m ³
50	500	585	1455	430	222	612	1250	26	6	36	22	BM 90/15	0,05	1500	75	115	1,45
75	750	835	1455	555	222	612	1355	40	9	54	34	BM 90/15	0,05	1500	95	130	2,1
100	1000	1085	1455	680	322	712	2525	66	16	90	56	BM 90/15	0,05	1500	130	195	2,9
150	1500	1585	1455	680	322	712	2525	100	24	135	84	BM 90/15	0,05	1500	145	215	4,30