

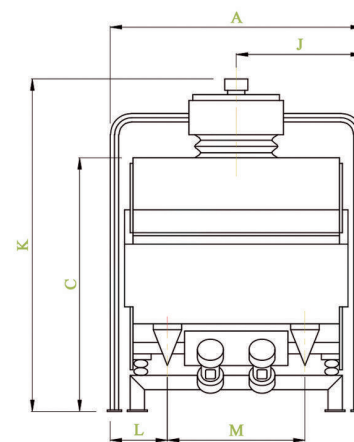


DRY STONE WITH
ASPIRATOR
GTSC

Dry stone separator is used for separating stones in coffee beans
(wheat – barley – corn –lentil-chick beans- bean- anise- thyme and sesame.

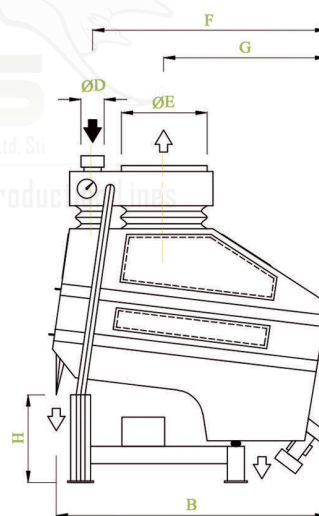

TYPE	DIMENSIONS (mm)												CAPACITY t/h max.	MOTOR			Air Need m ³ / min	Approx Weight Kg.		
	A	B	C	ØD	ØE	F	G	H	J	K	L	M		CEI Standart	Kw	Rpm		Net	Gross	Package m ³
120/120	1530	1650	1450	195	500	1500	1060	600	765	1550	260	900	6-9	2x BM 600/10-DM	0,35	1000	120	600	780	8,26
120/120/2	1530	1650	1700	195	500	1500	1060	600	765	1800	260	900	12-16	2x BM 600/10-DM	0,35	1000	130	1270	1650	9,16
120/120/A	1640	1650	1450	195	500	1520	1060	600	775	2650	270	900	6-9	2x BM 600/10-DM AGM 132 M4	0,35 7,5	1000 1500	120	1125	1425	11,70
120/120/2A	1640	1650	1700	195	500	1520	1060	600	775	2940	270	900	12-16	2x BM 600/10-DM GM 160 M4	0,35 11	1000 1500	130	1850	2390	12,60

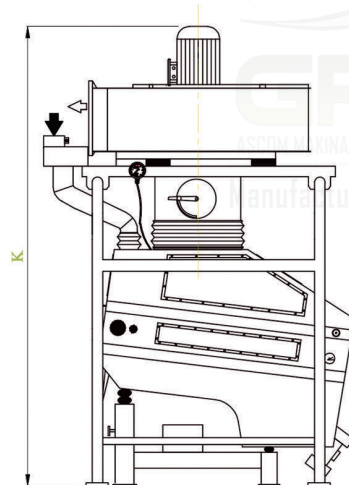

GPS-ASCOM

