

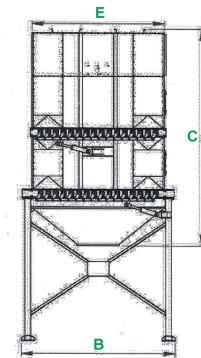
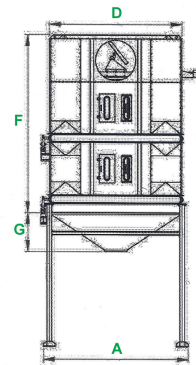


Double Deck Cooler GSG

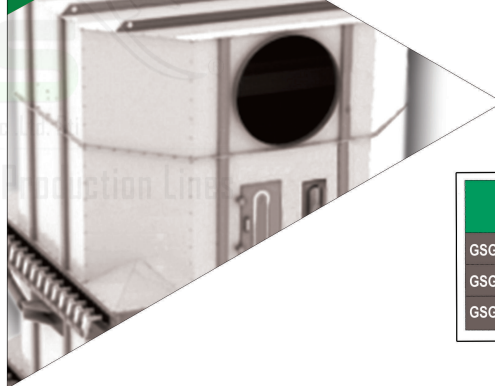

Double deck cooler is designed to avoid retention time for factories with often product passages. Available opening-closing grids at cooler bottom and top decks, top and bottom level indicators for every deck to arrange product level in body. Product is filled from closed grid at bottom to top level indicator through airlock. Air intake is occurred from holes on panels, hot air is sucked by aspiration system from top cell, thus product is begun to cool from bottom to top. When product is lowered to bottom indicator, grid is closed meanwhile product filling is continued.

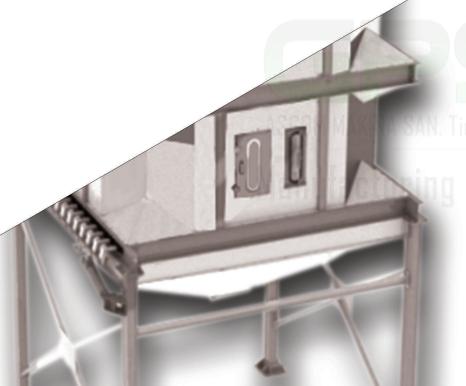

MODEL	DIMENSIONS						
	A	B	C	D	E	F	G
GSG 2400*2400	2800	2760	4325	2500	2500	2965	850
GSG 2870*2870	3280	3430	5950	2925	2925	5000	1050
GSG 3550*3550	3970	4210	5950	3625	3625	5000	1050