


## ELEVATOR GGEU

B



Elevator used for carrying out pulse and cereal etc. in vertical direction at mainly food industry. Machine is fully manufactured of steel construction and which works dustless ,silent, independent and coupled. Elevator is chosen for capacity, various types of special steel and plastic bucket to be connected depending on work ambient. Specially designed motor bracket suitable for every type of reducer motors and has advantages of having usage in each two directions. Speed adjustment control system , sensor and back return locking control units can be installed as require. Complete chrome (AISI 304) models are available optionally.

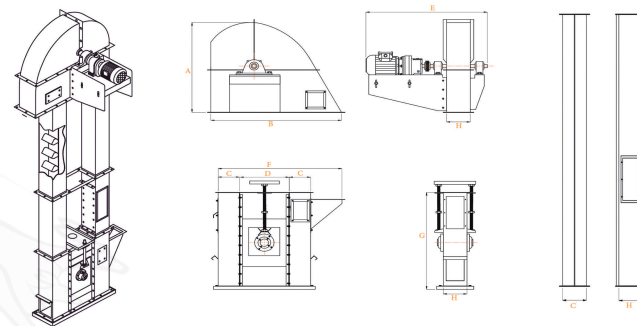

TYPE	DIMENSIONS (mm)								Rotor Diameter mm*mm	Belt mm.	Bucket mt. /5	CAPACITY Wheat max. t/h	CAPACITY Flour max. t/h	REDUCER MOTOR		
	A	B	C	D	E	F	G	H						CEI Standart	Kw	Rpm
160	550	770	160	300	795	920	630	160	300x140	120	110	8.5	5	MR 22-90 S/4	1,1	100
180	705	915	180	300	910	1000	740	180	301x160	140	1202	11	8	MR 272-100 L/46	3	100
200	720	955	200	350	1000	1050	785	200	400x180	160	140	15	10	MR 282-112 M/4	4	100
220	840	1090	220	400	1020	1140	890	220	400x200	180	160	18	14	MR 372-132 S/4	5,5	100
240	840	1120	240	450	1040	1280	895	240	500x220	200	180	22	18	MR 52-132 M/4	7,5	100
260	860	1170	260	500	1060	1370	910	260	500x240	220	200	26	20	MR 52-160 M/4	11	100
280	865	1210	280	540	1160	1500	970	280	500x260	240	220	32	26	MR 52-160 M/4	11	100
320	1005	1360	320	560	1170	1590	1075	320	600x300	280	240	36	28	MR 62-160 L/4	15	100
340	1010	1385	340	580	1190	1730	1075	340	600x320	300	260	42	32	MR 62-180 M/4	18,5	100
360	1010	1410	360	600	1310	1820	1080	360	600x340	320	280	50	34	MR 72-180 L/4	22	100
450	1026	1530	320	625	1490	1965	1095	450	600x420	360	320	80	50	MR 72-200 L/4	30	100



**GPS-ASCOM**