






ELEVATOR GGEU

Semolina Impact Detacher is used for increasing the efficiency of flour diagrams at the suitable semolina passages. Semolina Impact Detacher allows contraction and relaxation at diagrams. It is used as throttle at the over back point of the pneumatic carrying pipes after the roller mills. With the help of the small sizes and suitable dimensions assemble easily to the ceiling and the floor. Semolina Impact Detacher used for separating and breaking the clustered particles to the grinded fine and medium semolina. At the time, it can lower the ash. Semolina Impact Detachers have two models.

1.model : pins of top constant disc is round, and pins of bottom rotating disc is square.
2.model : pins of top constant disc and pins of bottom rotating disc are manufactured in conical shape. All pins (round, square and conical shape) are subjected to heat treatment for hardening purpose.

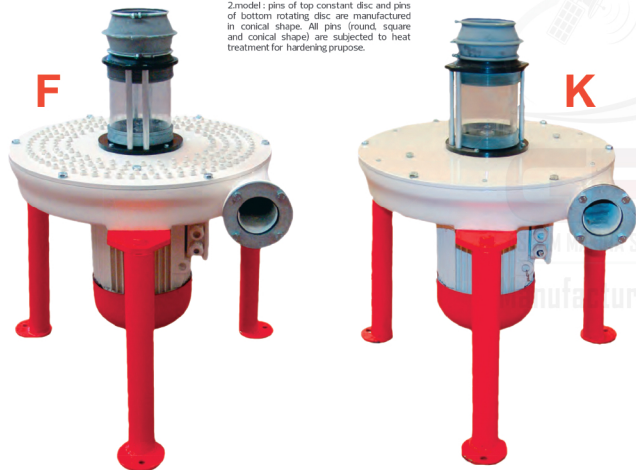

TYPE	DIMENSIONS (mm)						Capacity t/h	MOTOR			Approx Weight Kg.		
	ØA	ØB	ØC	D	E	F		CEI Standart	Kw	Rpm	Net	Gross	Package m³
B/51	135	80	630	795	625	515	1,0	AGM 132 S2q	5,5	3000	125	162	0,6
B/61	135	80	630	795	625	515	1,6	AGM 132 S2b	7,5	3000	135	175	0,6
B/51	135	80	630	890	720	610	2,3	AGM 160 M2a	11	3000	155	201	0,7
B/61	135	80	630	890	720	610	2,8	AGM 160 M2b	15	3000	165	214	0,7