


## ELEVATOR GPDE

102



Elevator used for carrying out pulse and cereal etc. in vertical direction at mainly food industry. Machine is fully manufactured of steel construction and which works dustless ,silent, independent and coupled. Elevator is chosen for capacity, various types of special steel and plastic bucket to be connected depending on work ambient. Specially designed motor bracket suitable for every type of reducer motors and has advantages of having usage in each two directions. Speed adjustment control system, sensor and back return locking control units can be installed as require.

101

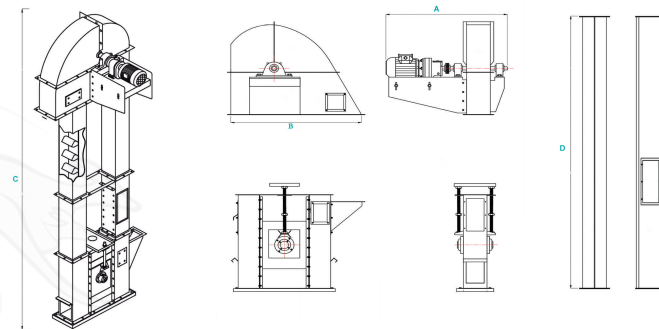

Machine Code	Technical Specifications		Machine Dimensions				Volume M <sup>3</sup>	Weight Kg
	Capacity	Motor	A (mm)	B (mm)	C (mm)	D (mm)		
GPDE - 6000	5 ton / h	1,1 KW	900	1400	Optional	3000	5,50	760
GPDE - 10000	10 ton / h	2,2 KW	1250	1600	Optional	3000	6,50	1150