

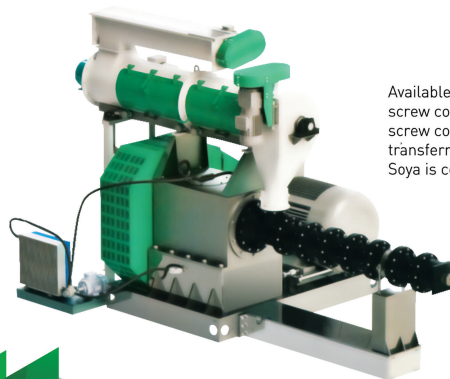


EXTRUDER GEX



Available conditioner, feeding screw conveyor and vertical screw conveyor on extruder. Crushed soya bean in feeding screw conveyor and conditioner is heated with steam. Then transferred to pressurized barrel by vertical screw conveyor. Soya is cooked with friction way in barrel.

Feed the animals with raw soya may effected healthy negatively. We reach high temperature (160°C) by friction way in short time thereby reduce and remove adverse effect of proteaz inhibitor, hemogglutinin, goitrogenic, allergen, etc.

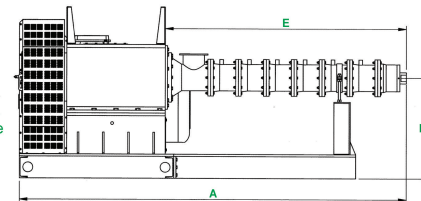

MODEL	DIMENSIONS					MOTOR POWER
	A	B	C	D	E	
GEK Ø195*2200	3534	2077	1465	920	2200	250 KW

GPS
ASCOM MAKINA SAN. Tİ.
Manufacturing

GPS-ASCOM