

## GKV-LC/KE


This machine is used to separate shell from the inside product. Certain amount of shell remained on top of the shaker is carried away by fan absorption system.

The Huller Shaker is designed as a rigid structure all steel frame with optional two or four screened shaker trays and two eccentric shafts with balance wheels for vibration-free operation.

We produce two d

Model	Type	Dimensions (mm.)			Capacity (MT/24H.)	Motor Power (H.P.)	
		Length	Width	Height		Machine	Feeder
<b>GKV-KE-02</b>	2 Tray	4995	1830	1700	125 (± 10%)	4	2
<b>GKV-KE-04</b>	4 Tray	4620	2010	3000	200 (± 10%)	5,5	2

GKV-KE-2

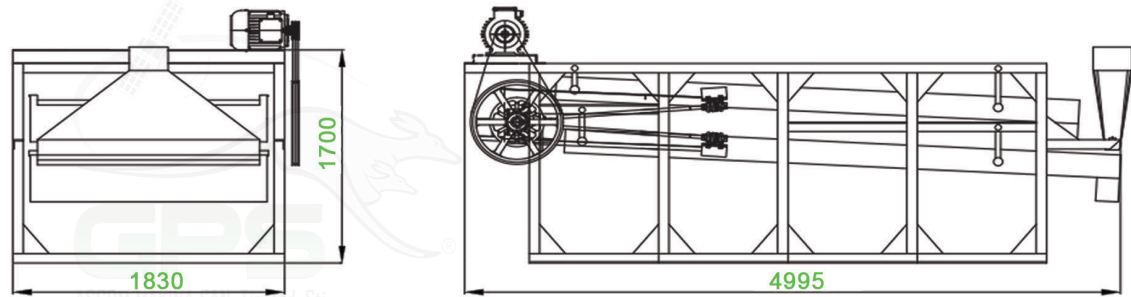

GKV-KE-4

