
Model	Dimensions (mm.)			Roller Dimensions (mm.)	Capacity	Motor Power (H.P.)	
	Length	Width	Height	Diameter x Length (mm.)	(MT/24H.)	Main	Feeder
GKV-RM-600	2320	2200	2430	600 x 1300	200 (±10%)	60 (2pcs.)	3

FLAKING ROLLER MILL GKV-RM-600

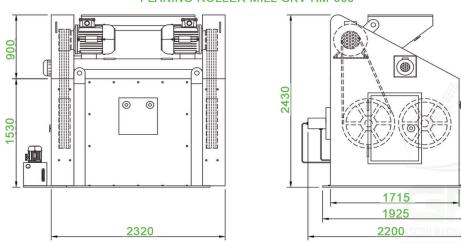

It is used for flaking of multiple crushed oilseeds like white cottonseed, sun flower kernel, soybean, canola etc.

The Flaking Roller Mill KV-RM-600 is designed as a rigid structural all steel frame guarantees a very long life for the machine.

The machine works hydraulically with two rotating rollers. Flaking Rollers are chilled cast iron with surface hardness and face ground smooth.

- The pressure of the rollers can be manually adjusted by hydraulic unit.
- The desired thickness of the fakes is set by the hydraulic pressure.

