

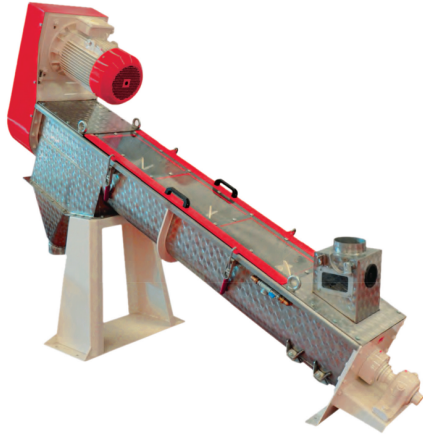


**INCLINED INTENSIVE
DAMPENER
GSCB**



Inclined intensive dampener machine designed for supplying high humidity ratio in cereals product. Machine is used for given standard dampening at dry cleaning units in flour and semolina factories. Minimum dampening time supplies the maximum ratio of dampening. They are made in complete chrome (AISI 304). It is compatible for Turkish Food Codex conditions.

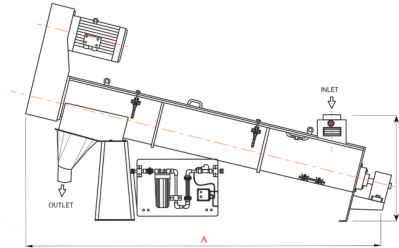

TYPE	DIMENSIONS (mm)				CAPACITY t/h	MOTOR			Approx Weight Kg.		
	A	B	C	D		1.Cleaning	CEI Standard	Kw	Rpm	Net	Gross
GSCB 250	2900	2100	850	850	9-12	GM 160 L6	11	1000	580	754	2,6
250	2900	2100	850	850	12-15	GM 180 L6	15	1000	585	760	2,6
250	2900	2100	850	850	15-18	GM 200 La	18,5	1000	595	773	2,6
450	3020	2200	950	930	17-20	GM 200 La	18,5	1000	780	1014	2,7
450	3020	2200	950	930	19-22	GM 200 L6b	22	1000	795	1033	2,7