



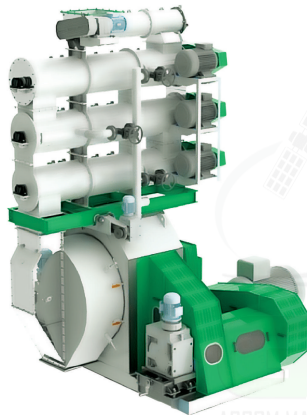


PELLET PRESS GPL

Semi finished product is carried by feeding screw conveyor to conditioner, double conditioner or pelpeak units. Steam softened product is gone to pressing section. Product evenly spreaded between die and rollers is pelleted in 1,5-12 mm. Pellet lenght can be arranged by knives as requirements. Liquid adding is possible to using machines. Materials to be adding to product can be done automatically or manually.



MODEL	DIMENSIONS			MOTOR POWER	ROLLER DIMETER	ROLLER QTY	PELLETING SURFACE (cm2)	TIP SPEED (500H) (m/s)
	A	B	C					
GPL Ø453*112	2000	1700	1250	55 Kw	Ø 210	2	1650	7,4
GPL Ø520*132	2450	2300	1650	110 Kw	Ø 250	2	2156	8,5
GPL Ø520*175	2450	2350	1650	132 Kw	Ø 250	2	2858	8,5
GPL Ø660*230	2740	2700	1890	200 Kw	Ø 320	2	4868	6,1
GPL Ø760*230	2950	2900	1950	250 Kw	Ø 350	2	5491	7,1
GPL Ø900*250	3330	4020	2290	315 Kw	Ø 365	2	7068	7,3
GPL Ø1200*350	3610	5190	2780	560 Kw	Ø 500	2	13194	6,1