

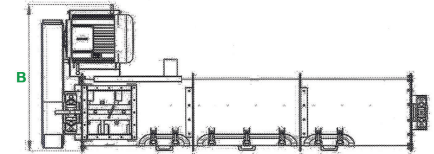
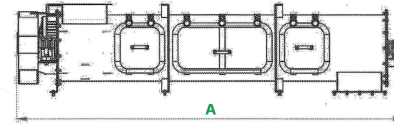
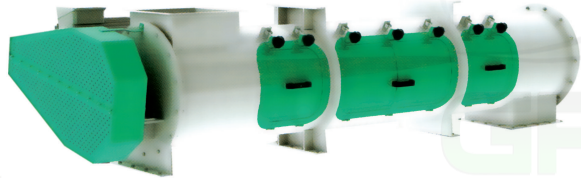


PELLET UNIT GKN

Conditioners consist of 1-3 layers as pellet press capacity. Conditioner provides homogenous steam or liquid diffusion to product. Adjustable paddles obtain desired product tempering. Steam is injected to semi-finished product thus pelleting capacity increases.

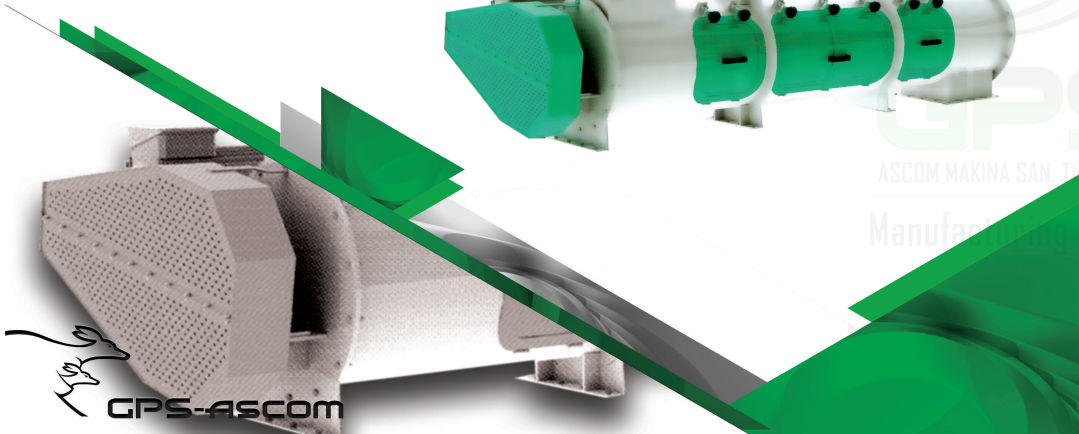

MODEL		DIMENSIONS			MOTOR POWER	PELLET PRESS	QTY
		A	B	C			
GKN	Ø300	2240	820	540	4 Kw	PL 305*90	1
						PL 305*102	1
						PL 453*112	1
GKN	Ø400	2250	830	600	5,5 Kw	PL 520*132	1
GKN	Ø450	2250	850	640	7,5 Kw	PL 520*175	1
GKN	Ø450	3310	1040	660	11 Kw 15 Kw	PL 900*250	1
						PL 660*230 PL 760*230	2 2

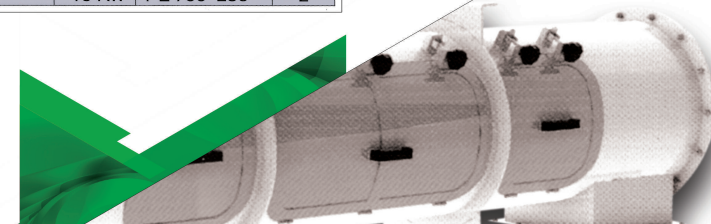

GPS-ASCOM