


## PELPEAK GPP

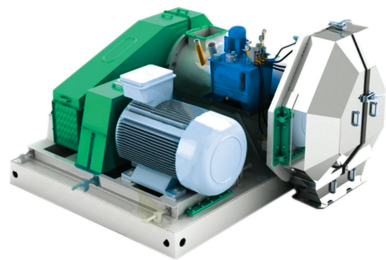

Pelpeak is used for pellet units and realises 2 aims together.

- Raise press efficiency
- Raise pellet quality

Pelpeak renders the feed to an optimum level before pelleting. It has two main units. The first unit, where liquids like oil, molasses, water and steam are added to the feed and blended; and the second, where the feed is compressed and intensified before pelleting. First unit has double hull and body in stainless steel. Rotor is installed with paddles with adjustable angle. Blended feed coming from first unit is gone to second unit through rotating roller and forced to percolate through conical rings with adjustable pitch. At this time feed is proportionately densified by pressing. Adjustable rings are controlled by 3 pcs hydraulic cylinder. Available liner rules on cylinders thereby follow each cylinder from panel. So you can regulate pitch automatically.

MODEL	DIMENSIONS			DIE Ø	DIE WIDTH	ROLLER Ø	ROLLER WIDTH	ROLLER QTY	MOTOR POWER
	A	B	C						
GPP Ø600*1500	3010	3010	1780	980	70	295	135	2	200

