
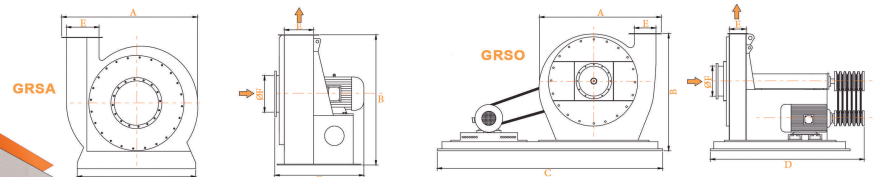


PNEUMATIC FAN GRSA

Used for transferring products with air aspiration in food industries. They have high productivity and provide minimum energy consumption according to its working conditions.

Pneumatic Fans are chosen by according to flow meter and pressure values and its body types are determined by according to using places. Body (chassis) section manufacturing according to motor power. Direct couple type and V-belt in special bearing housing

type of pneumatic fans are available in our manufacturing designs.

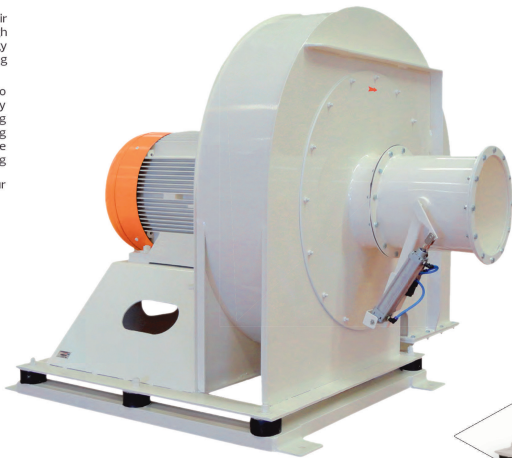

TYPE	DIMENSIONS (mm)						Sta. Pressure mm WS	Air Need m³/h	MOTOR			Approx Weight Kg.			
	GRSO - GRSA	A	B	C	D	E	OF		CEI Standart	Kw	Rpm	Net	Gross	Package m³	
45		1415	1397	1300	820	230x300	350	1200	12000	GM 225 M2	45	3000	555	605	2,34
55		1415	1397	1300	820	230x300	350	1200	13000	GM 250 M2	55	3000	569	629	2,34
75		1415	1397	1300	820	280x350	350	1200	14000	GM 280 S2	75	3000	582	640	2,34
90		1415	1397	1300	820	300x350	400	1300	15000	GM 280 M2	90	3000	596	700	2,34
110		1415	1397	1300	820	300x350	400	1300	17100	GM 315 S2	110	3000	615	760	2,34
132		1565	1397	1300	845	350x400	450	1400	19200	GM 315 M2a	132	3000	640	820	2,34
160		1565	1397	1300	845	350x400	450	1400	21100	GM 315 M2b	160	3000	660	880	2,34

