


PNEUMATIC GATE GPK

Flaps divert the product coming from top inlet to tow or three outlets




Tow-Way Symmetric

MODEL		DIMENSIONS			
		A	B	C	D
GKL	150*150	580	430	270	150
GKL	200*200	650	490	410	200
GKL	250*250	735	540	540	250
GKL	300*300	780	590	620	300
GKL	400*400	840	725	810	400

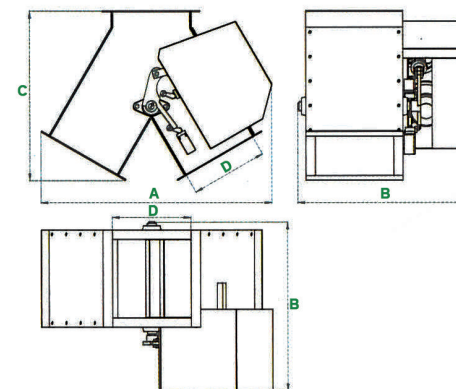

Three-Way Symmetric

MODEL		DIMENSIONS			
		A	B	C	D
GKL	150*150	640	430	525	150
GKL	200*200	790	490	640	200
GKL	250*250	940	540	740	250
GKL	300*300	1085	590	860	300
GKL	400*400	1490	725	1170	400

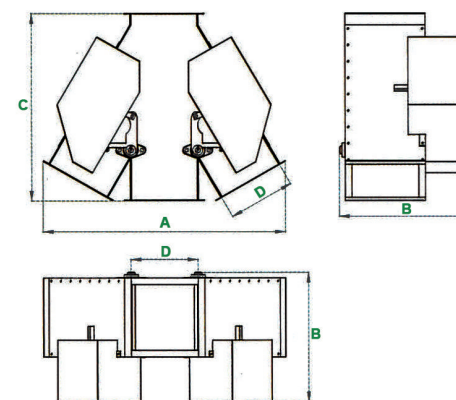

Machine directive 98/37/EC

Low voltage directive 73/23/EEC

Electro magnetic compatibility directive 89/336/EEC

Applicable harmonized Standard: 292-1, 292-2, EN 1050, EN 287, EN 60204-1, EN 61000, EN 55011



GPS-ASCOM