


## Process Weigher GSRX



It is used for online monitoring of final products.  
Different weighers are used for each kind of  
obtained product. Extraction values are controlled  
by PLC and reported as daily monthly and yearly.

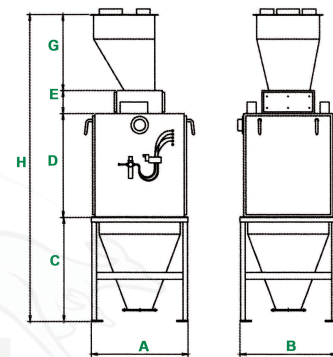

TYPE	A	B	C	D	E	G	H	CAPACITY (t / h)				AIR		AIR REQUIREMENT (at 1 bar - mbar)	
								m3	WHEAT	FLOUR	BRAN	m3 / min	lt / dk	m / bar	
SERK 7	680	680	800	700	300	420	2220	0,058	12 - 18	6 - 8	2,5 - 4	8	60	5 - 6	
SERK 18	850	850	900	900	350	650	2800	0,17	20 - 30	15 - 20	8,5 - 10	10	60	5 - 6	
SERK 30	1050	1050	1000	920	400	800	3120	0,32	50 - 60	-	-	12	60	5 - 6	

