
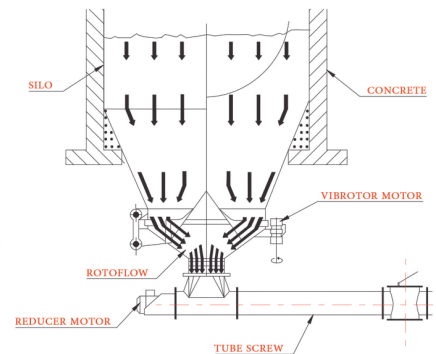


ROTOFLOW (Unloader)

GEAS

Rotoflow used for discharging silos smoothly from flour, cereal, bran etc. Exit hole is connected to the main body by steel joints and the funnel is connected to a vibrator motor. So the product in the silos can be easily installed over the tube screw and conveyor. It is assembled with the concrete and steel silos.



TYPE	DIMENSIONS (mm)					CEI Standard	Vibro Motor		Approx Weight Kg.		
GEAS	ØA	ØB	ØC	D	E		Kw	Rpm	Net	Gross	Package m³
60	130	600	700	500	440	BM 90/15	0,055	1500	50	110	0,6
	135	600	700	500	440						
	140	600	700	500	440						
130	300	1300	1410	900	750	BM 520/15	0,23	1500	295	380	2,1
	400	1300	1410	900	750						
	500	1300	1410	900	750						
160	400	1600	1690	1040	900	BM 750/15	0,35	1500	440	560	4,3
	500	1600	1690	1040	900						
	600	1600	1690	1040	900						
185	500	1850	1980	1240	915	BM 1100/15	0,43	1500	580	700	5,2
	600	1850	1980	1240	915						
	700	1850	1980	1240	915						

GPS-ASCOM