


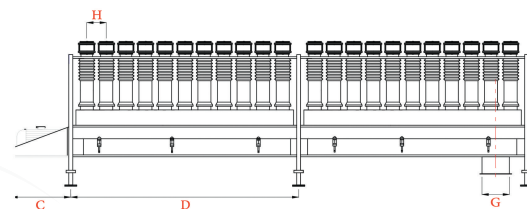



SCREW CONVEYOR GEAS

Flour Screw Conveyor used for carrying of final products which come together from different sections in horizontal direction. Displaying glasses are available on entrance of flour screw conveyor enable seeing the product flows. Changing of holes are very easy by means of using plastic spiral pipes. Covers are available over the screw conveyor, they provide easiness for protection and it has doors below the basin for easy cleaning. Two lines model and three lines model are available according to using places. Complete chrome (AISI 304) model can be made upon request.

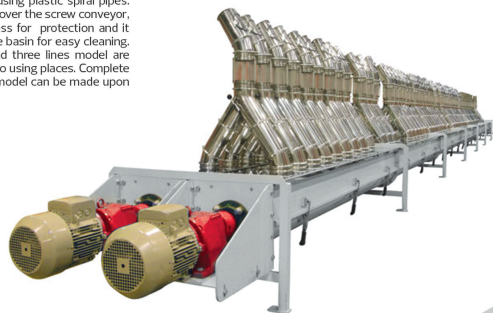

TYPE 3



TYPE 2

TYPE GEAS	DIMENSIONS (mm)								Lenght m.	Capacity Bran max. t/h	Capacity Flour max. t/h	Reducer Motor		
	A	B	C	D	E	F	G	H				CEI Standert	Kw	Rpm
180	1200	!	560	2000	135	!	200 200	175	!	1,5-2,8	3,5-6,3	MR 172 90/54 MR 203 100L/4a	1,1-2,2	100
200	1200	!	560	2000	135	!	220 220	175	!	2,2-3,8	4,8-9,6	MR 172 90L/4 MR 272 100L/4b	1,5-3	100
250	1400	!	580	2000	135	!	270 270	175	!	4-7	10-19	MR 202 100L/4a MR 372 112M/4	2,2-4	100
300	1400	!	580	2000	135	!	320 320	175	!	7-15	19-27	MR 272 100L/4b MR 372 132 S/4	3-5,5	100