


## SCREW CONVEYOR

GMHW

Screw conveyor used for carrying, mixing and wetting of flour and grain particles in horizontal direction by the help of leaves, which have the same shape with screw. Screw conveyor can be manufactured in various dimensions depending on capacity. Left and right leaves used in it. Sheets are made is special for more and accurate productivity. Complete chrome (AISI 304) model can be made according to required.

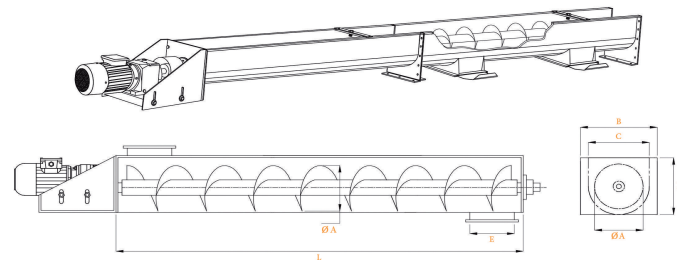

TYPE	DIMENSIONS (mm)						CAPACITY Wheat max. t/h	CAPACITY Flour max. t/h	CAPACITY Grain max. t/h	REDUCER MOTOR		
	GMHW	ØA	B	C	D	E	L/m			CEI Standard	Kw	Rpm
125	125	205	145	215	145x145	1	3,150	2,677	0,63	MR 003 80/4a	0,55-0,75	100
150	150	230	170	240	170x170	1	5,440	4,624	1,088	MR 102 80/4b	0,75-1,1	100
165	165	245	185	275	180x180	1	7,240	6,154	1,448	MR 172 90/54	1,1-2,2	100
180	180	280	200	290	200x200	1	9,40	7,990	1,88	MR 202 100L/4a	1,1-2,2	100
200	200	300	220	300	220x220	1	12,900	10,965	2,58	MR 172 90L/4	1,5-3	100
220	220	320	240	325	240x240	1	17,160	14,586	3,432	MR 272 100L/4b	2,2-4	100
230	230	330	250	350	250x250	1	19,610	16,668	3,922	MR 202 100L/4a	2,2-4	100
250	250	350	270	370	270x270	1	25,190	21,411	5,038	MR 372 112M/4	3-5,5	100
270	270	370	290	400	290x290	1	31,730	26,970	6,346	MR 272 100L/4b	3-5,5	100
300	300	420	320	430	320x320	1	43,520	36,992	8,704	MR 372 132/54	5,5-7,5	100
330	330	450	350	510	350x350	1	57,930	49,240	11,586	MR 472 132/M4	5,5-7,5	100
350	350	470	370	530	370x370	1	69,110	58,743	13,822	MR 372 132/54	7,5-11	100
400	400	520	420	560	420x420	1	103,170	87,964	20,634	MR 502 160/M4	11-15	100

GPS-ASCOM