
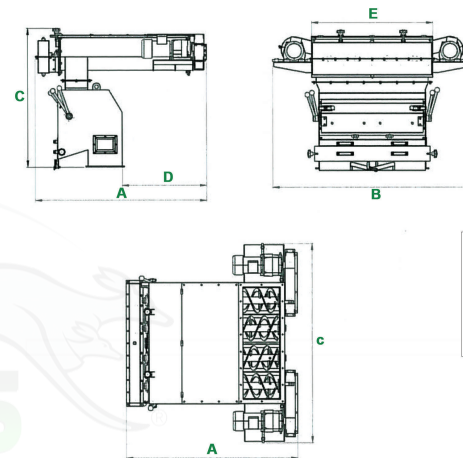


## ULTRA PELET GBS

### ULTRA PELET PREPARATIVE

UPH can be manufactured in various dimensions as pellet press capacity. Conditioner and feeding screw conveyor are installed on UPH. Steam is injected to product in conditioner and than heated product is received to UPH. Product remains between helix flights with slow motion in determined time and takes heat from whole surface. Product is processed in UPH at 80-85 °C. UPH enables to destroy bacterias of passing product.

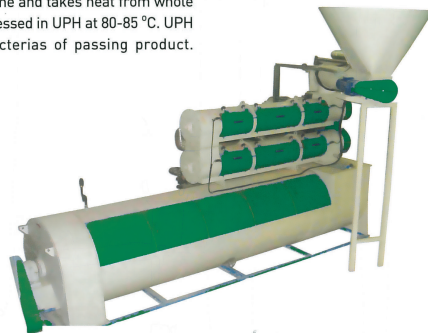

MODEL	DIMENSIONS				MOTOR POWER
	A	B	C	D	
GUPH 0900*4390	5500	1360	1710	1200	3 Kw
GUPH 01150*5500	6300	1450	1970	1475	4,5 Kw

