


**OVERWEAPPING
PACKING**

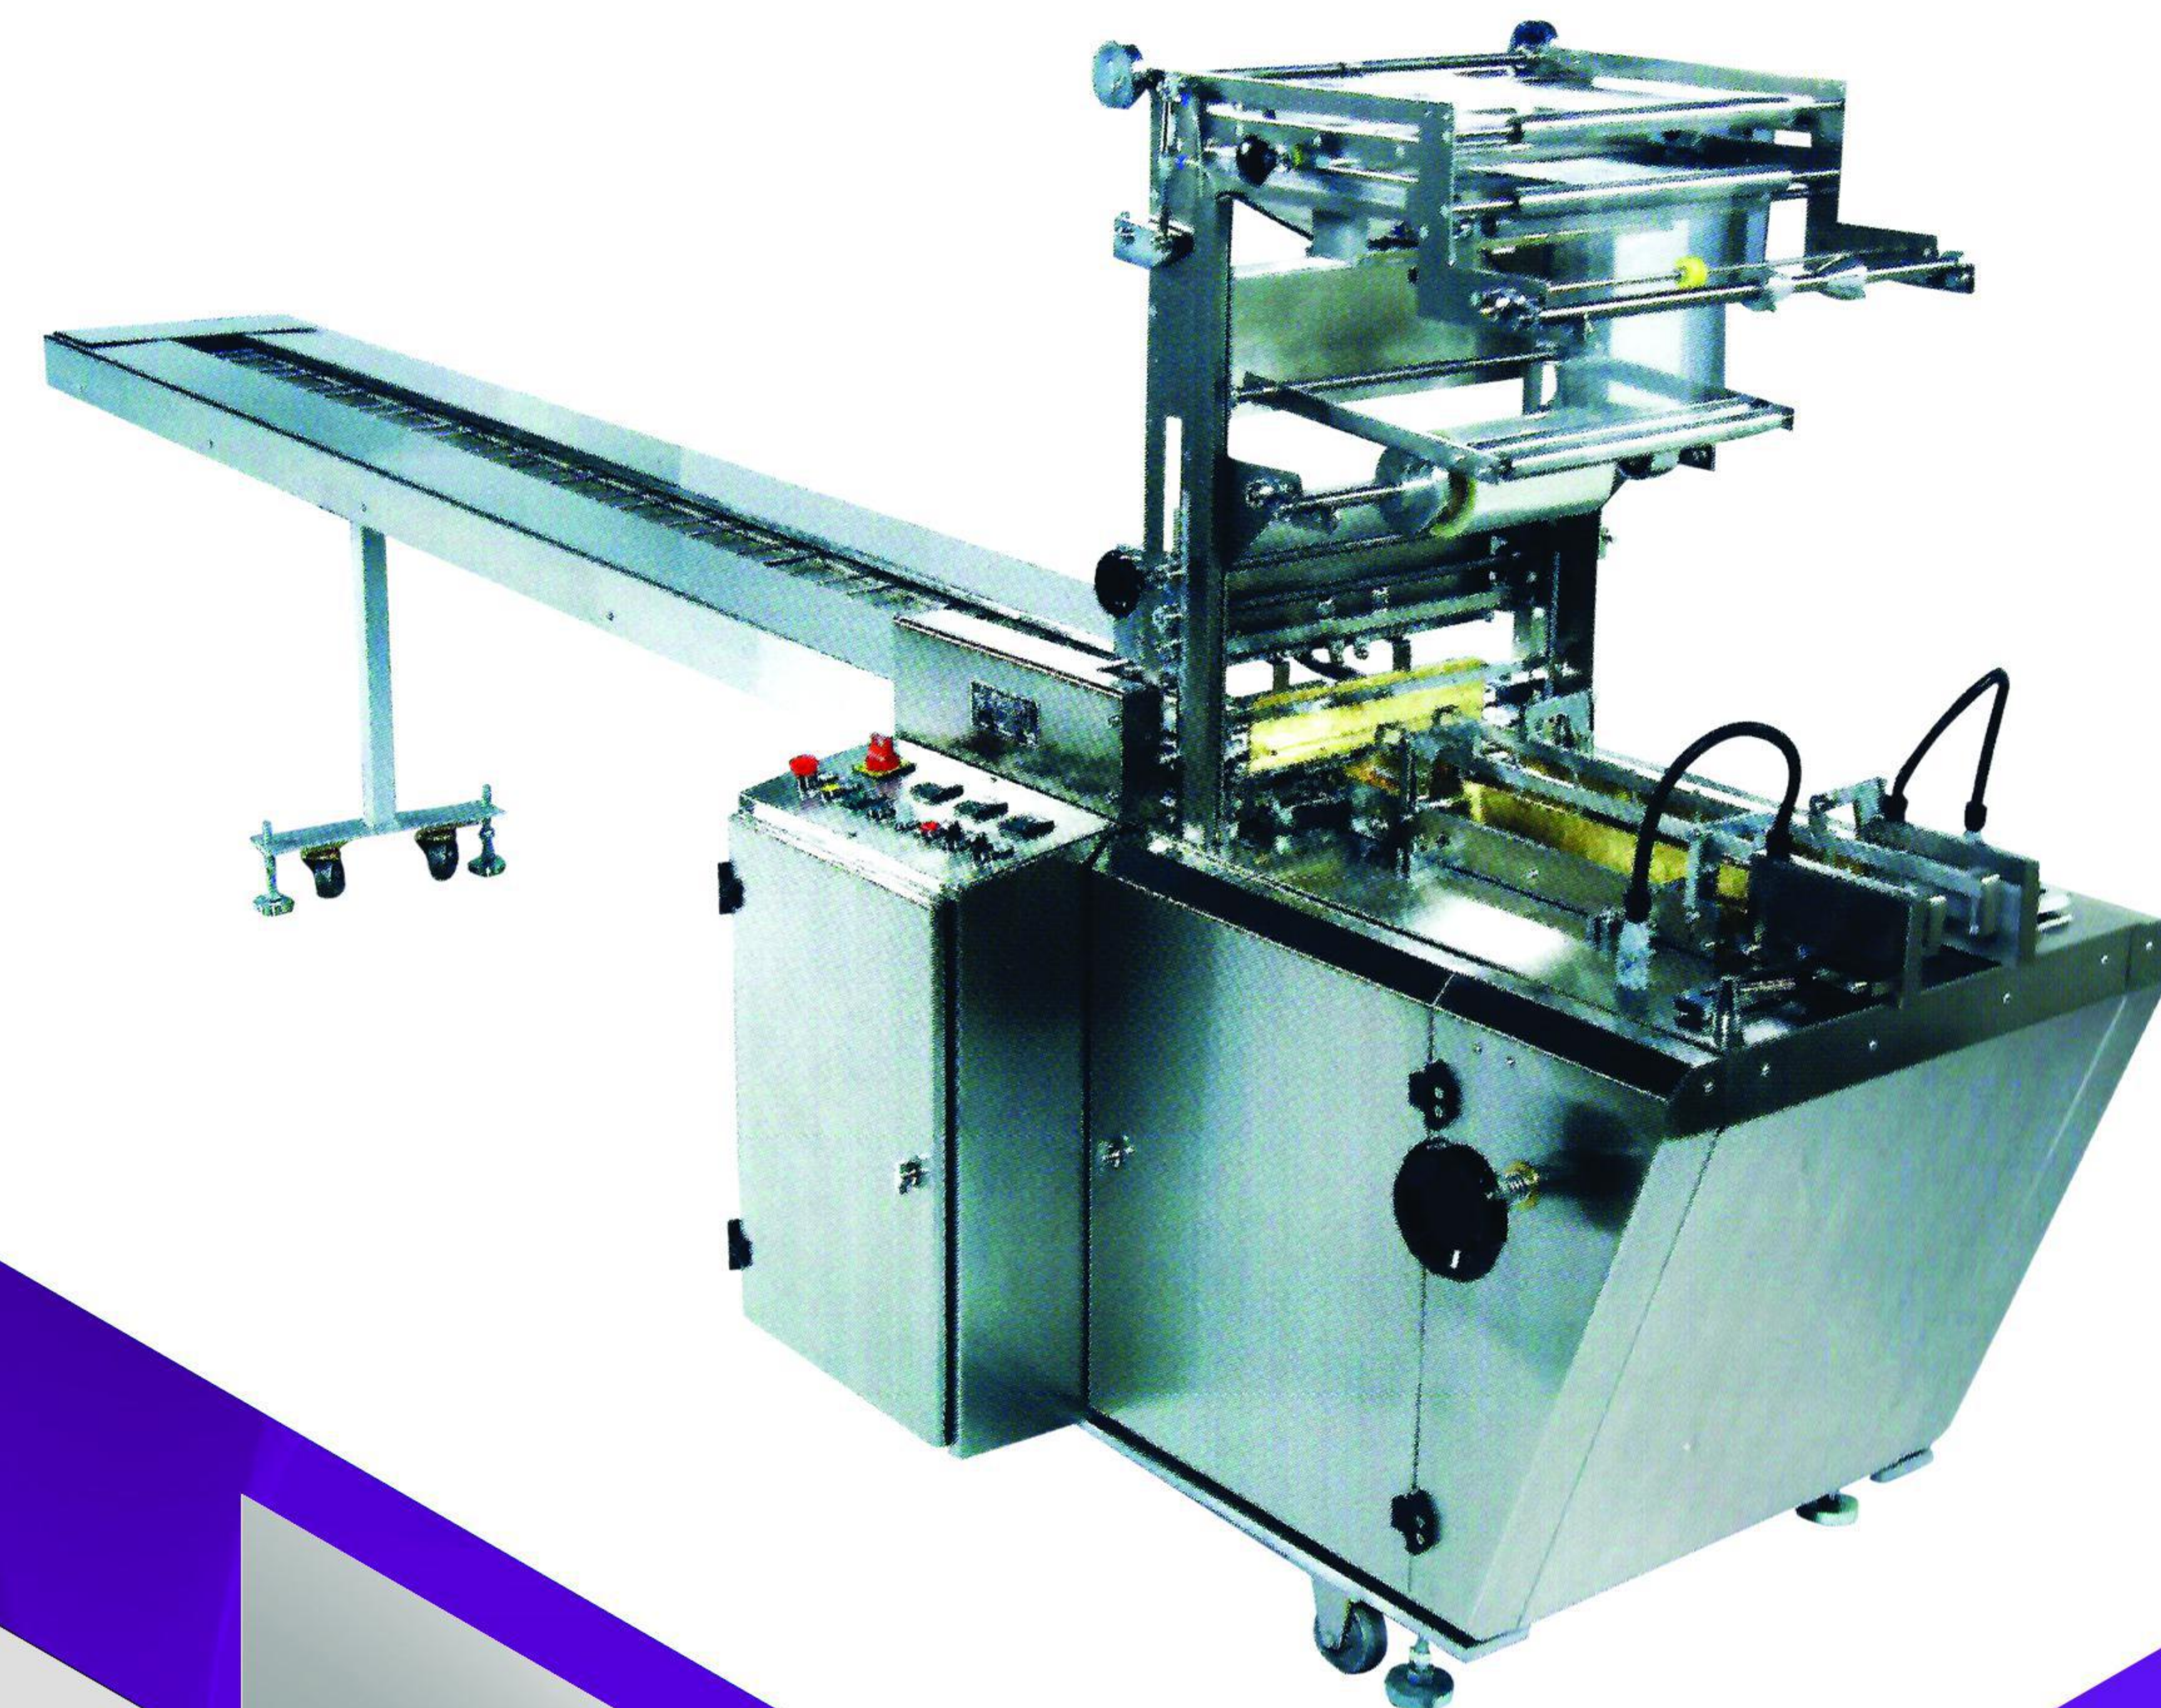

TYPE ESK-OWP-01
CAPACITY 30-50 PPM, 30-50 PAK. / DAK
ROUND BISCUIT Ø 30 – 70 MM
RECTANGULAR BISCUIT WIDTH - 30 – 75 MM
PACKAGE LENGTH - 50 – 300 MM
ELECTRICAL POWER - 3 KW
WEIGHT – 1100 KG
WRAPPING MATERIALS – CELLOPHANE, PVC (SELOFAN, PVC)

WRAPPING DIMENSIONS – MAX Ø 350X350 MM (MAKS. Ø 350X350 MM)

TECNICAL PROPERTIES

PACKING EASY OPEN SYSTEM OPTIONS

MACHINE IS EQUIPPED WITH PHOTOCELL

ELEKTRONIC SPEED CONTROL




PACKAGING IS MADE BY HEAT SEALING OF SIDE SURFACE AND FRONT SURFACE. SIDE IS FOLDED LIKE ENVELOPE, FRONT SIDE IS ENFOLDED OR PILED AND HEAT SEALED.

THE MACHINE CAN BE ADJUSTED EASILY ACCORDING TO THE SIZE OF REQUIRED PRODUCT.

ROUND, RECTANGULAR, SQUARE, OVAL SHAPES ARE PACKED IN THE BEST POSSIBLE WAY.

SEALING IS DONE BY HEAT. HEAT THERMOSTATIC CONTROL.
STAINLESS STEEL OUTSIDE PLANKING.

OPTIONAL PARTS
PLC TOUCHPOINT CONTROL UNIT
DATE PRINTER

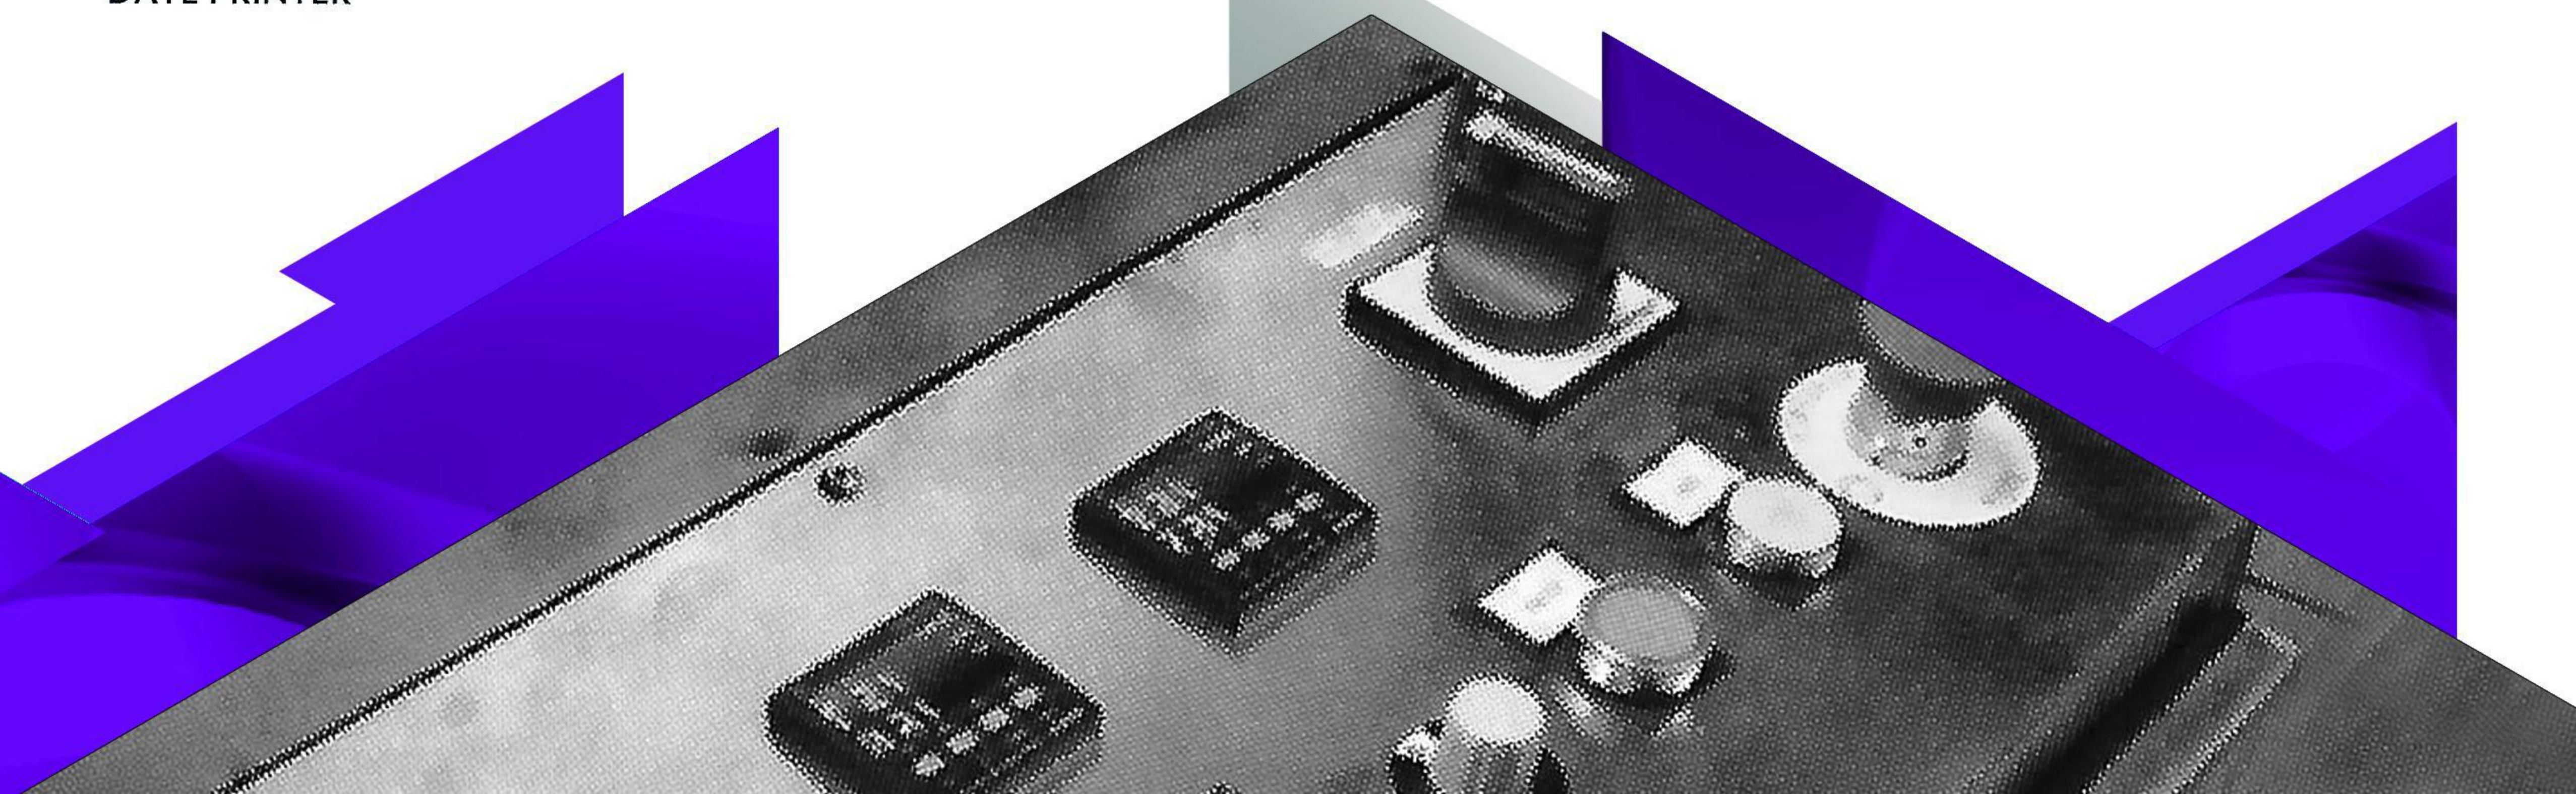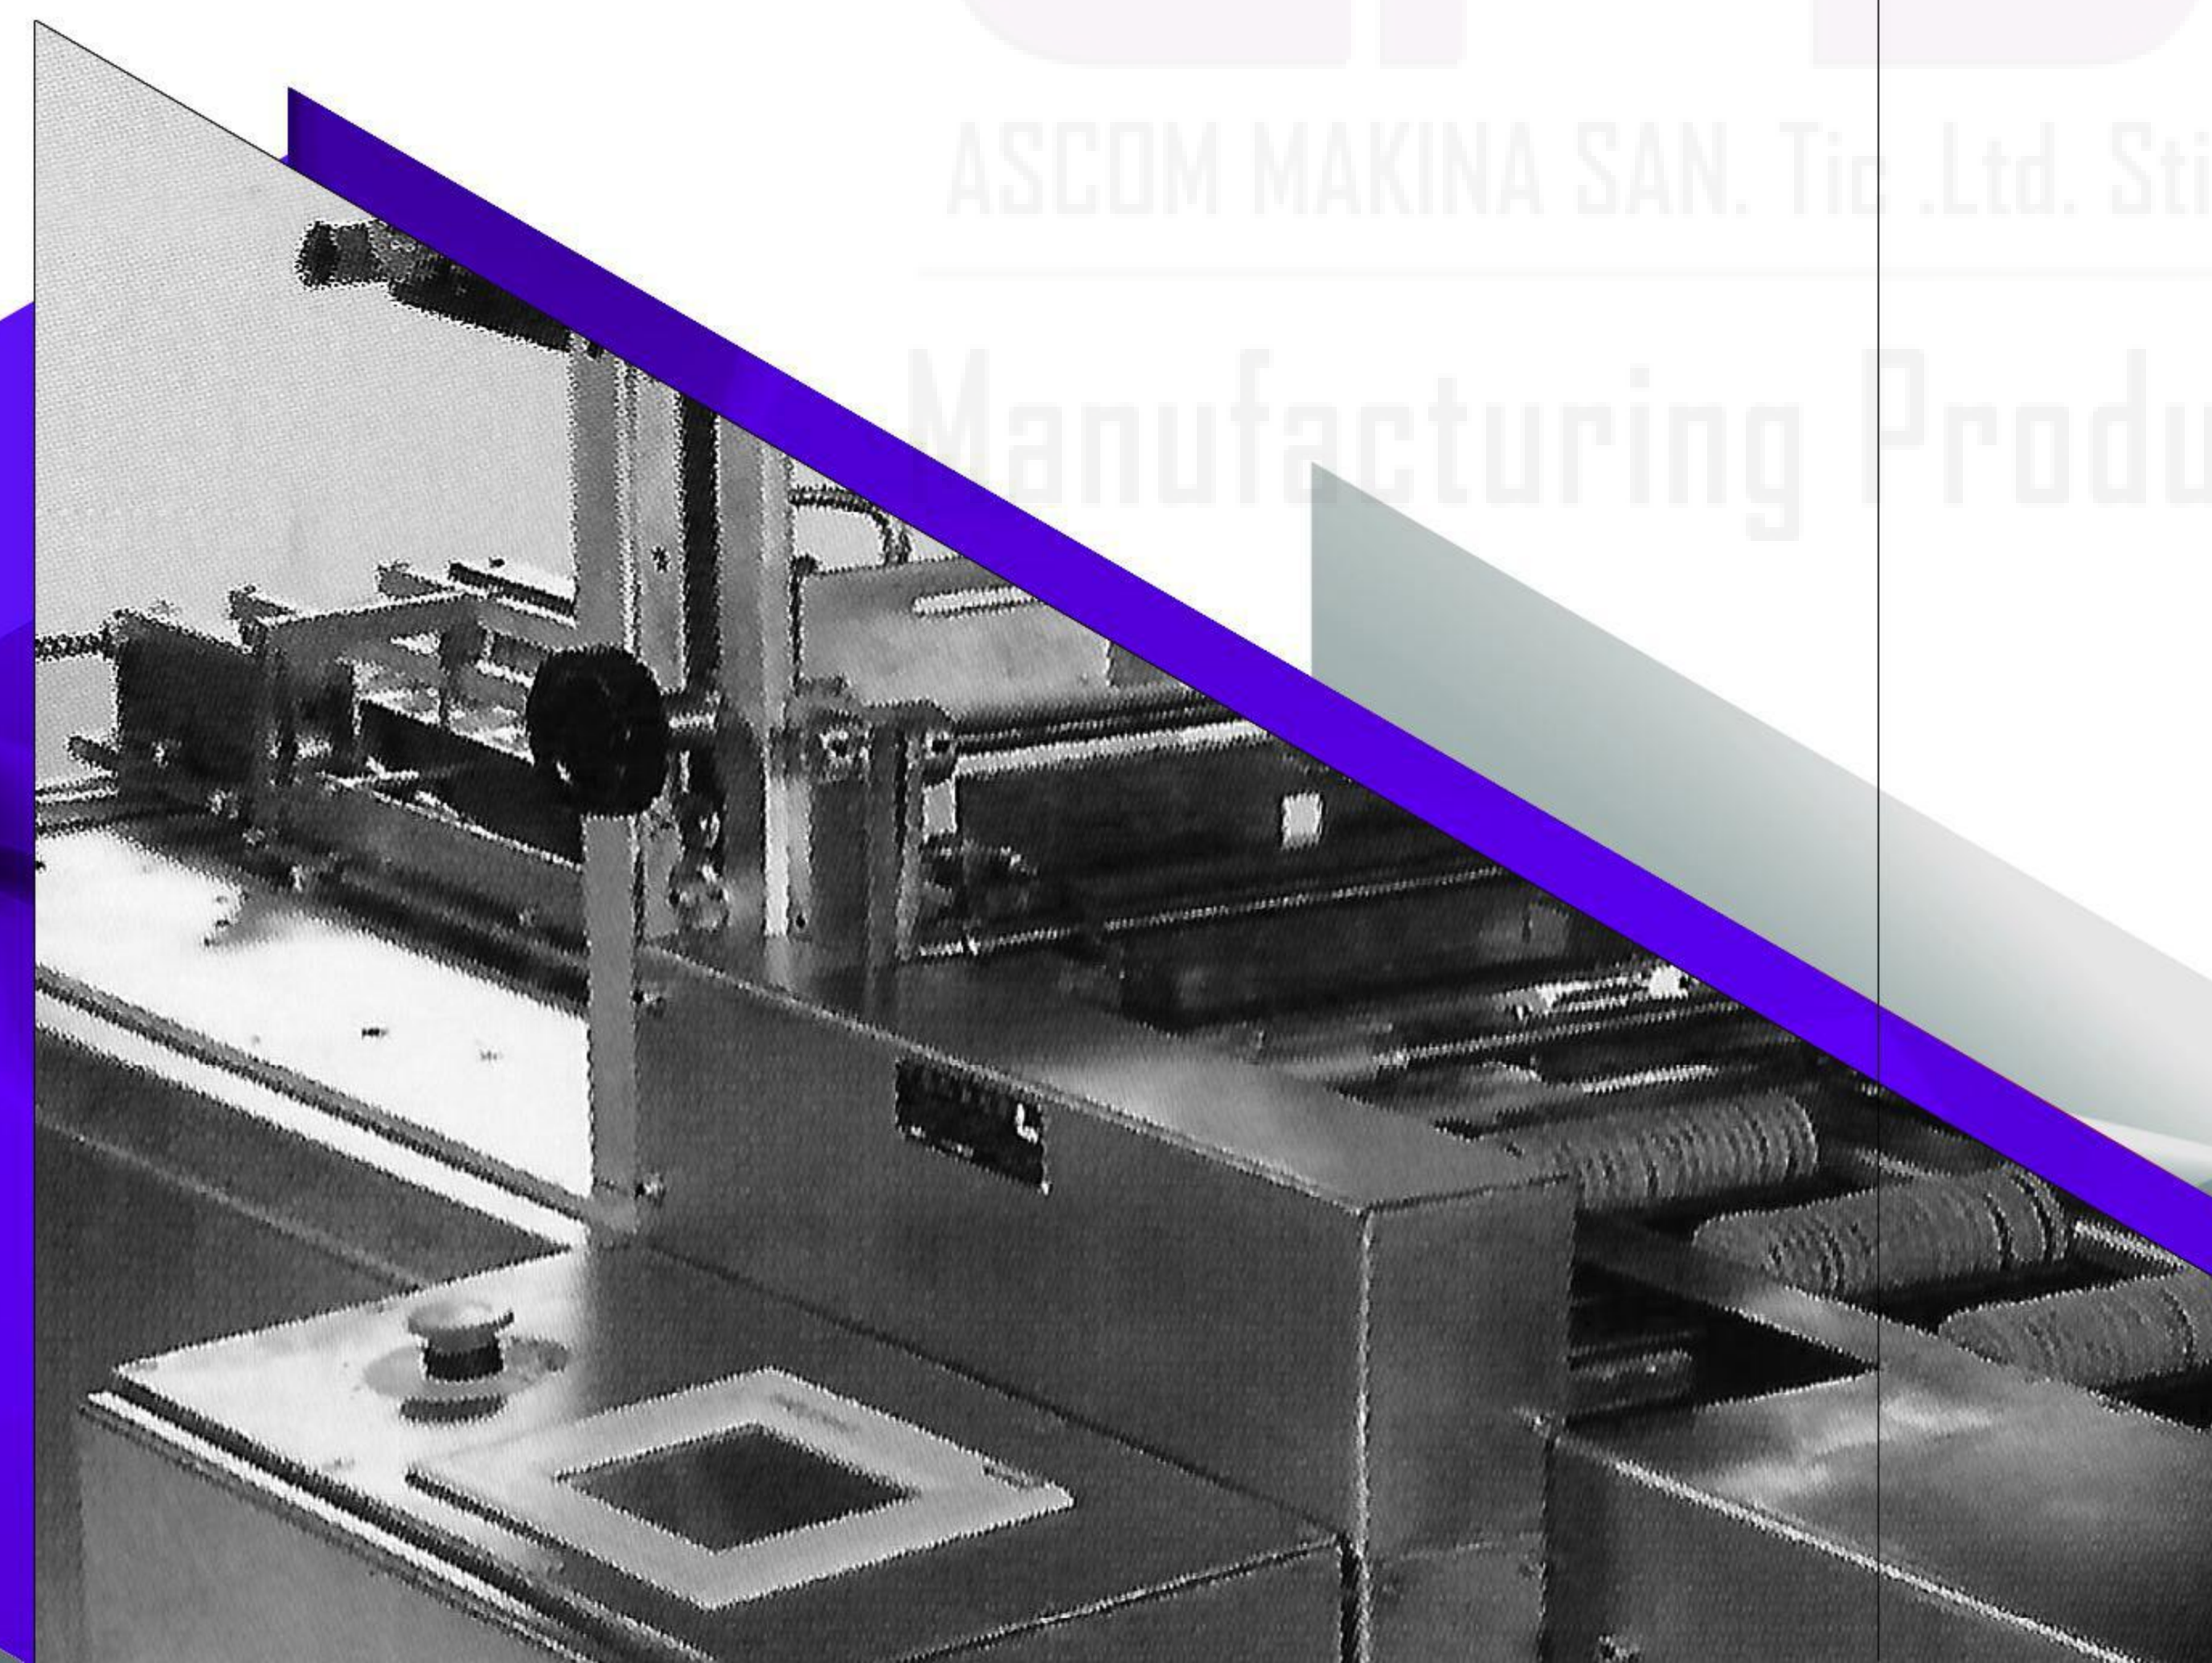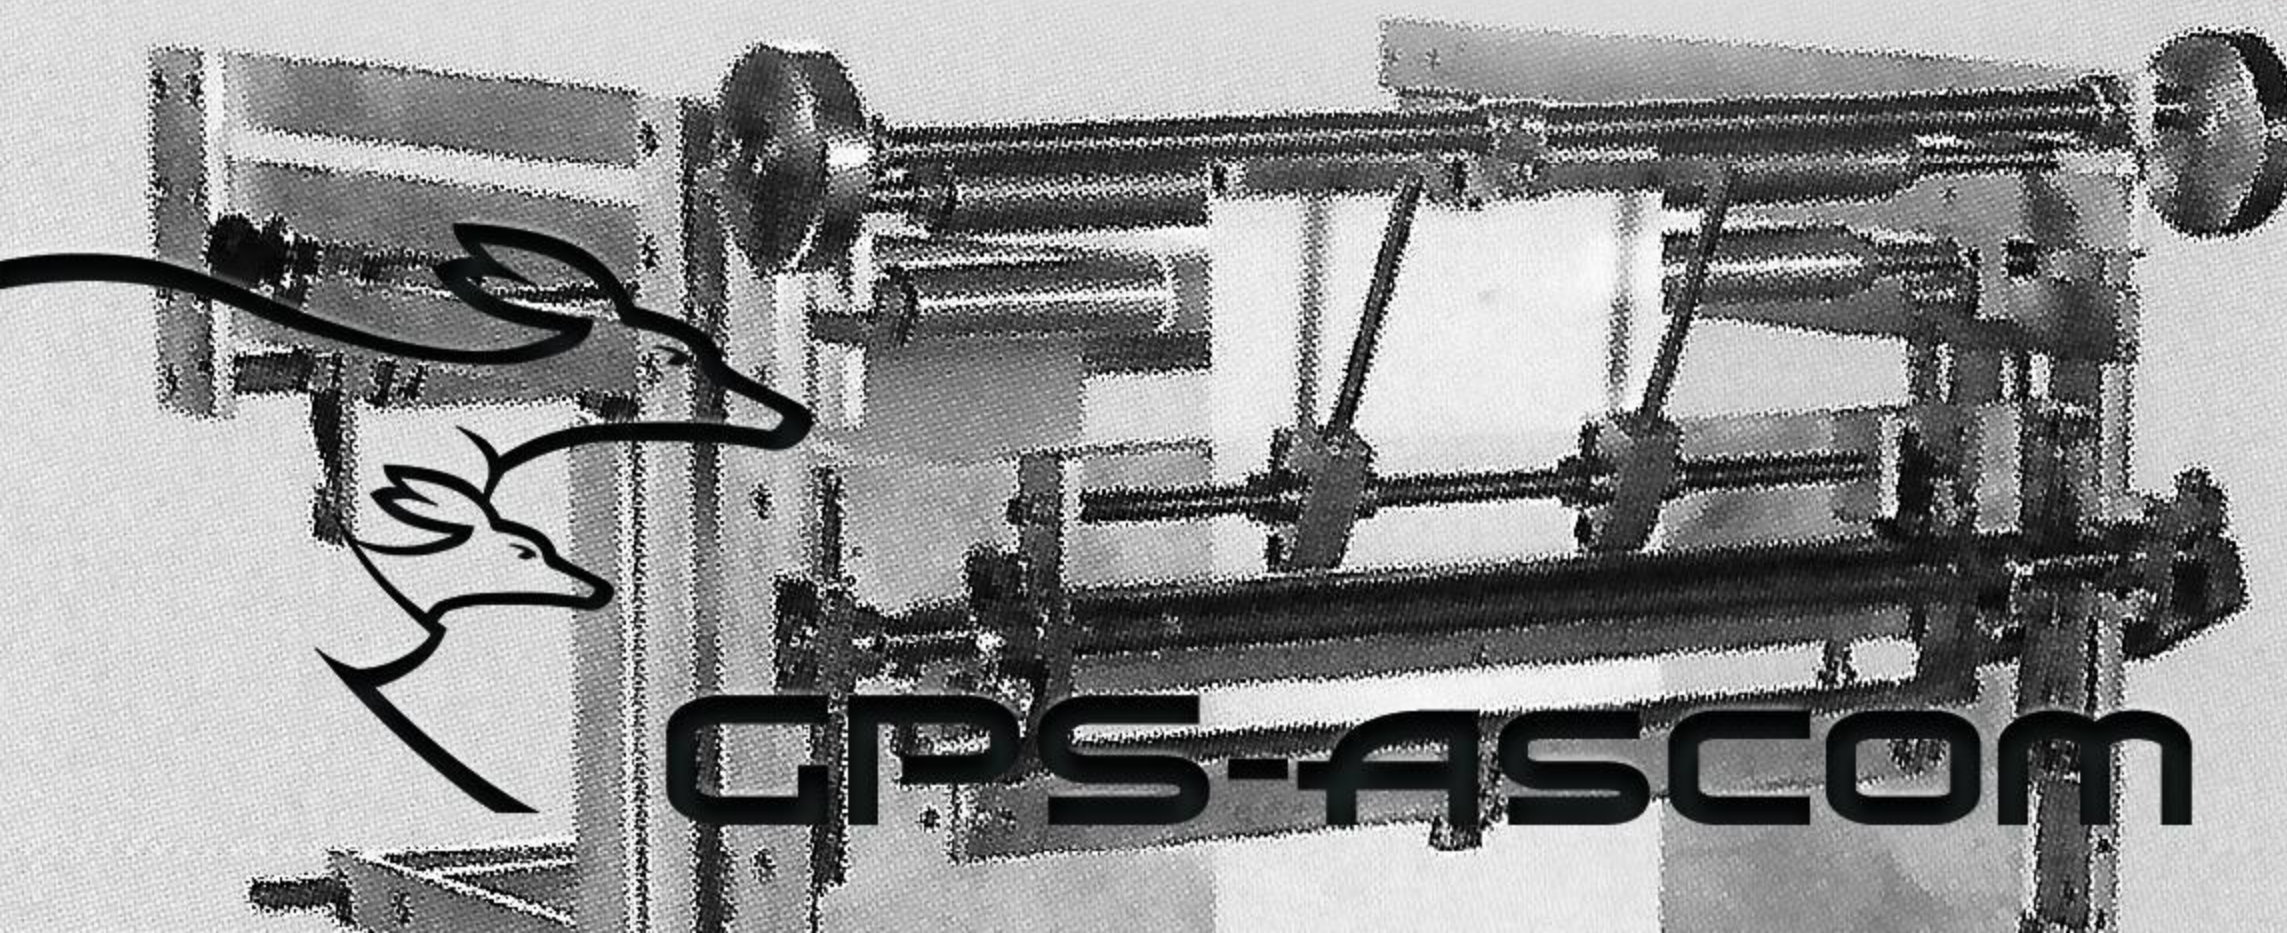

GPS
ASCOM MAKINA SAN. Tic. Ltd. Sti
Manufacturing Production Lines