


**OVERWEAPPING  
PACKING**

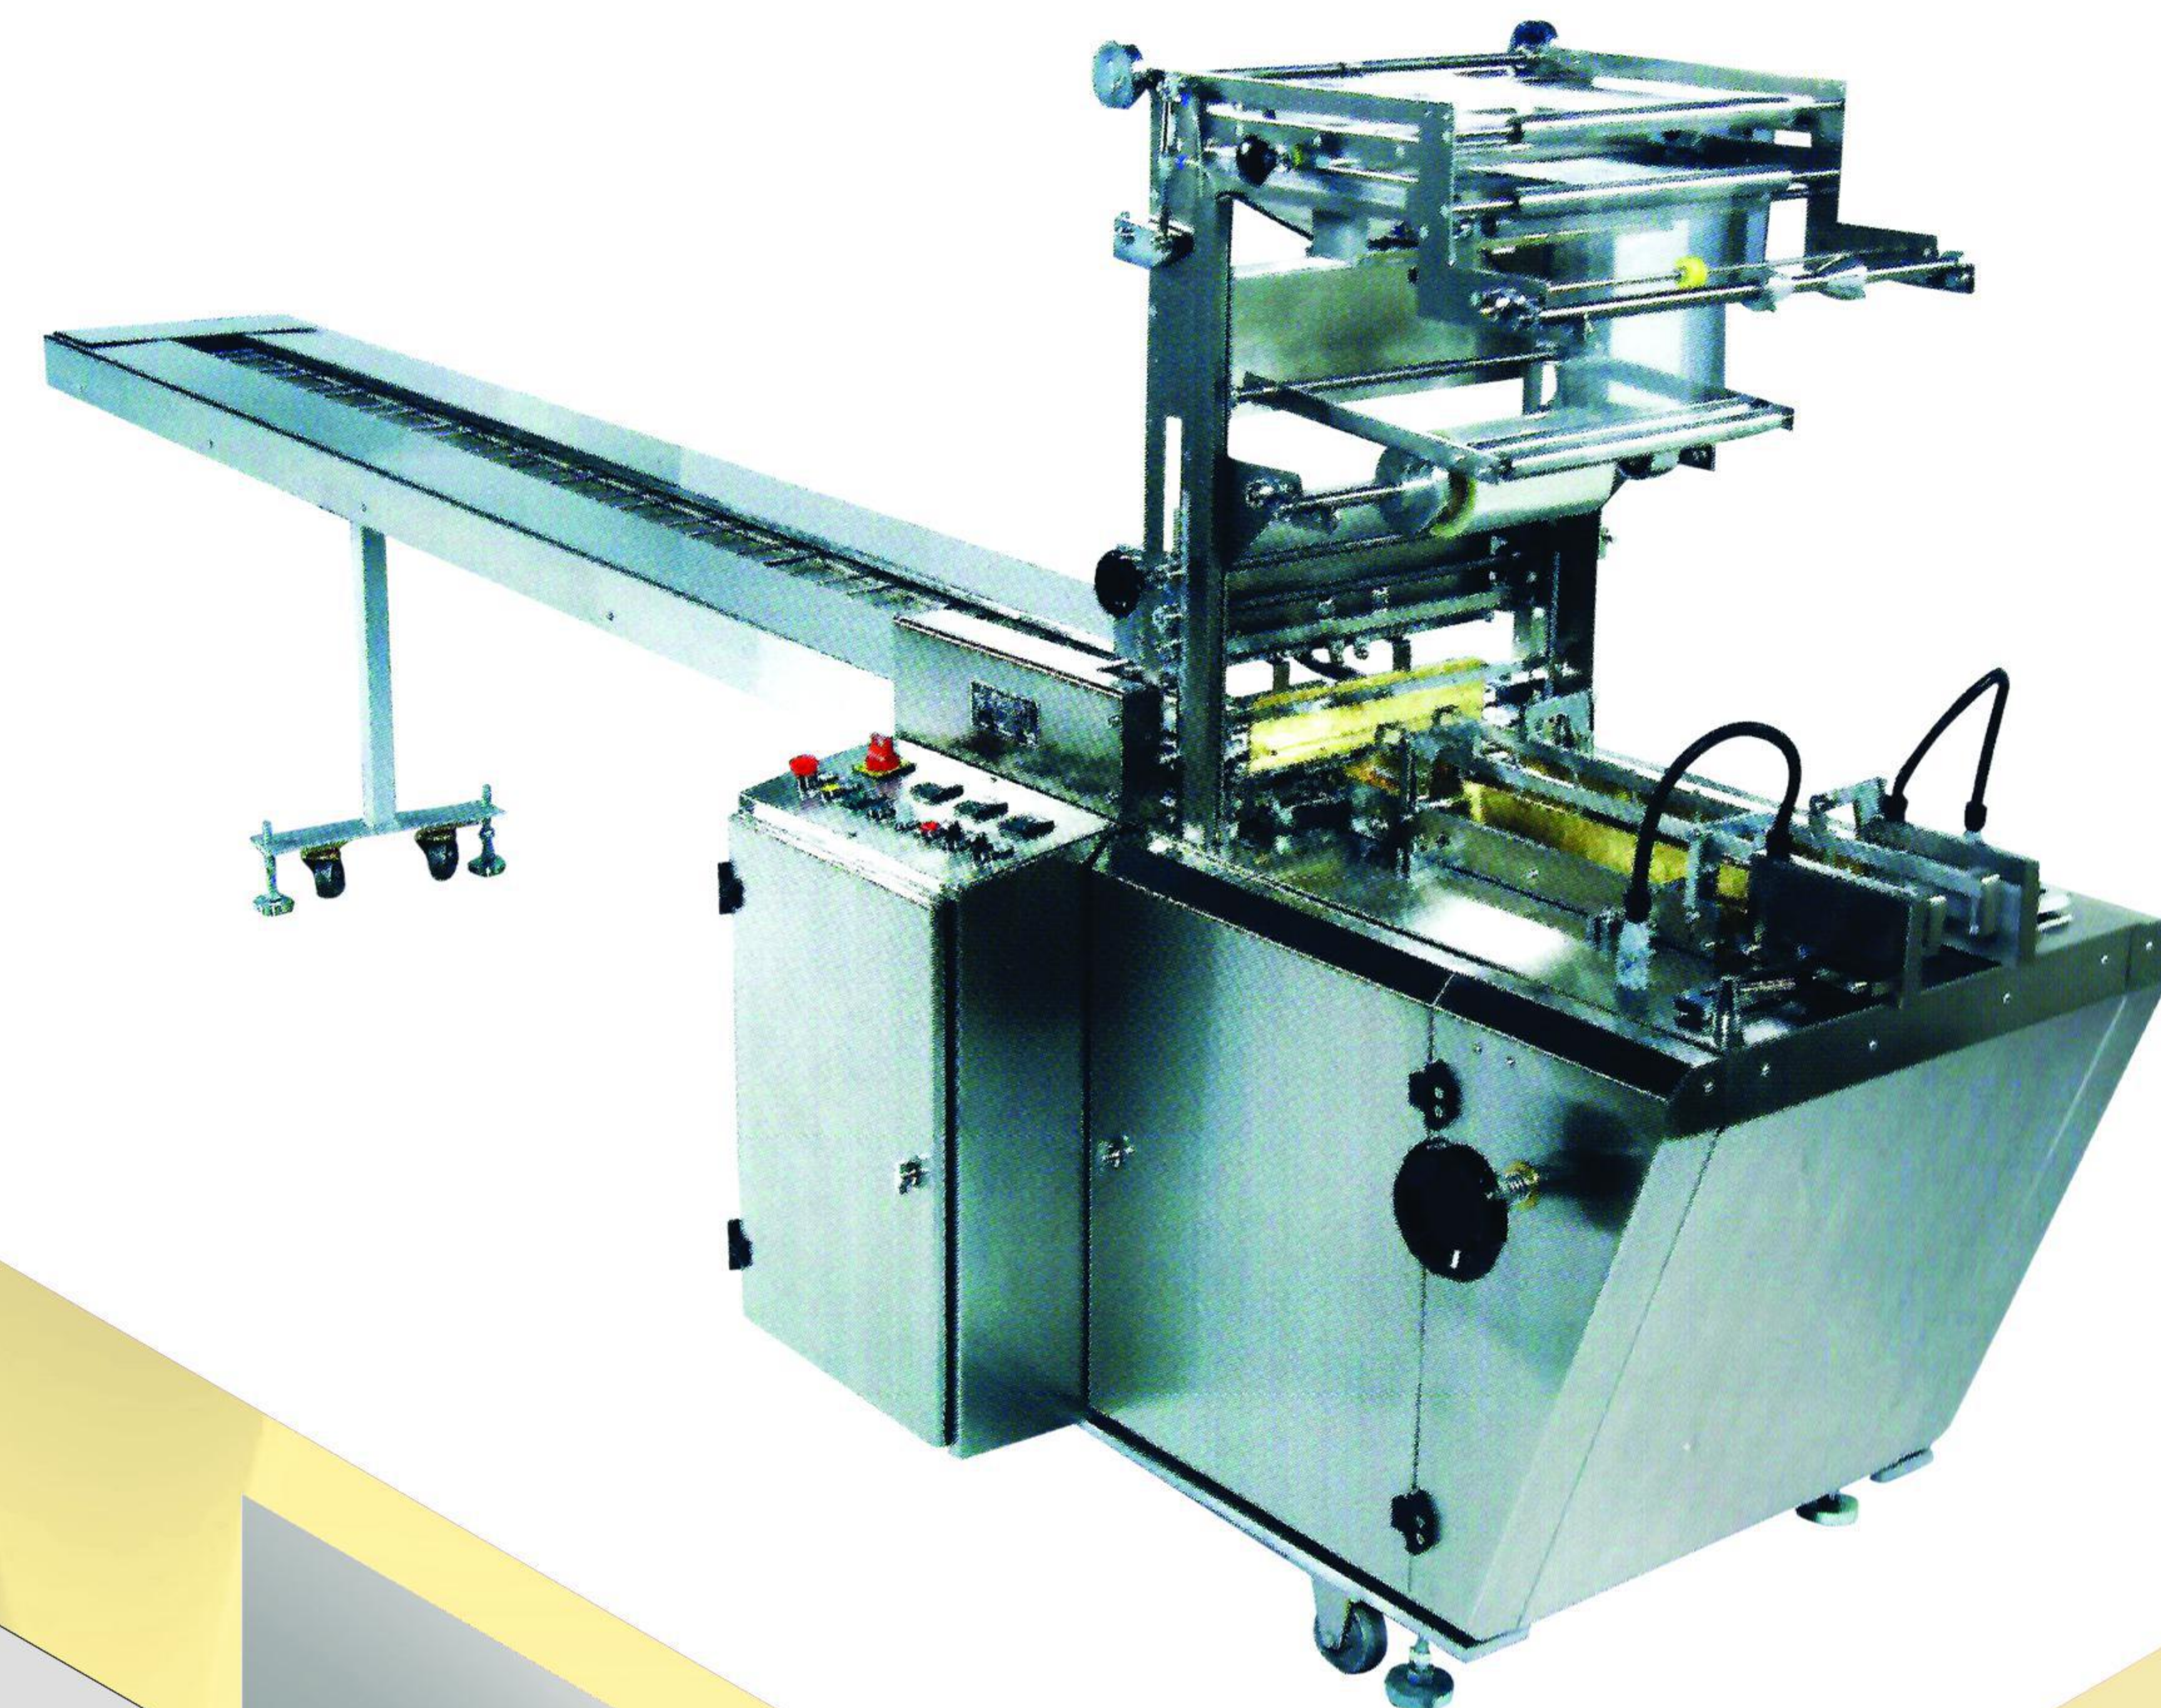

TYPE ESK-OWP-01  
CAPACITY 30-50 PPM, 30-50 PAK. / DAK  
ROUND BISCUIT  $\varnothing$  30 – 70 MM  
RECTANGULAR BISCUIT WIDTH - 30 – 75 MM  
PACKAGE LENGTH - 50 – 300 MM  
ELECTRICAL POWER - 3 KW  
WEIGHT – 1100 KG  
WRAPPING MATERIALS – CELLOPHANE, PVC (SELOFAN, PVC)

WRAPPING DIMENSIONS – MAX  $\varnothing$  350X350 MM (MAKS.  $\varnothing$  350X350 MM)

TECNICAL PROPERTIES

PACKING EASY OPEN SYSTEM OPTIONS

MACHINE IS EQUIPPED WITH PHOTOCELL

ELEKTRONIC SPEED CONTROL




PACKAGING IS MADE BY HEAT SEALING OF SIDE SURFACE AND FRONT SURFACE. SIDE IS FOLDED LIKE ENVELOPE, FRONT SIDE IS ENFOLDED OR PILED AND HEAT SEALED.

THE MACHINE CAN BE ADJUSTED EASILY ACCORDING TO THE SIZE OF REQUIRED PRODUCT.

ROUND, RECTANGULAR, SQUARE, OVAL SHAPES ARE PACKED IN THE BEST POSSIBLE WAY.

SEALING IS DONE BY HEAT. HEAT THERMOSTATIC CONTROL.  
STAINLESS STEEL OUTSIDE PLANKING.

OPTIONAL PARTS  
PLC TOUCHPOINT CONTROL UNIT  
DATE PRINTER

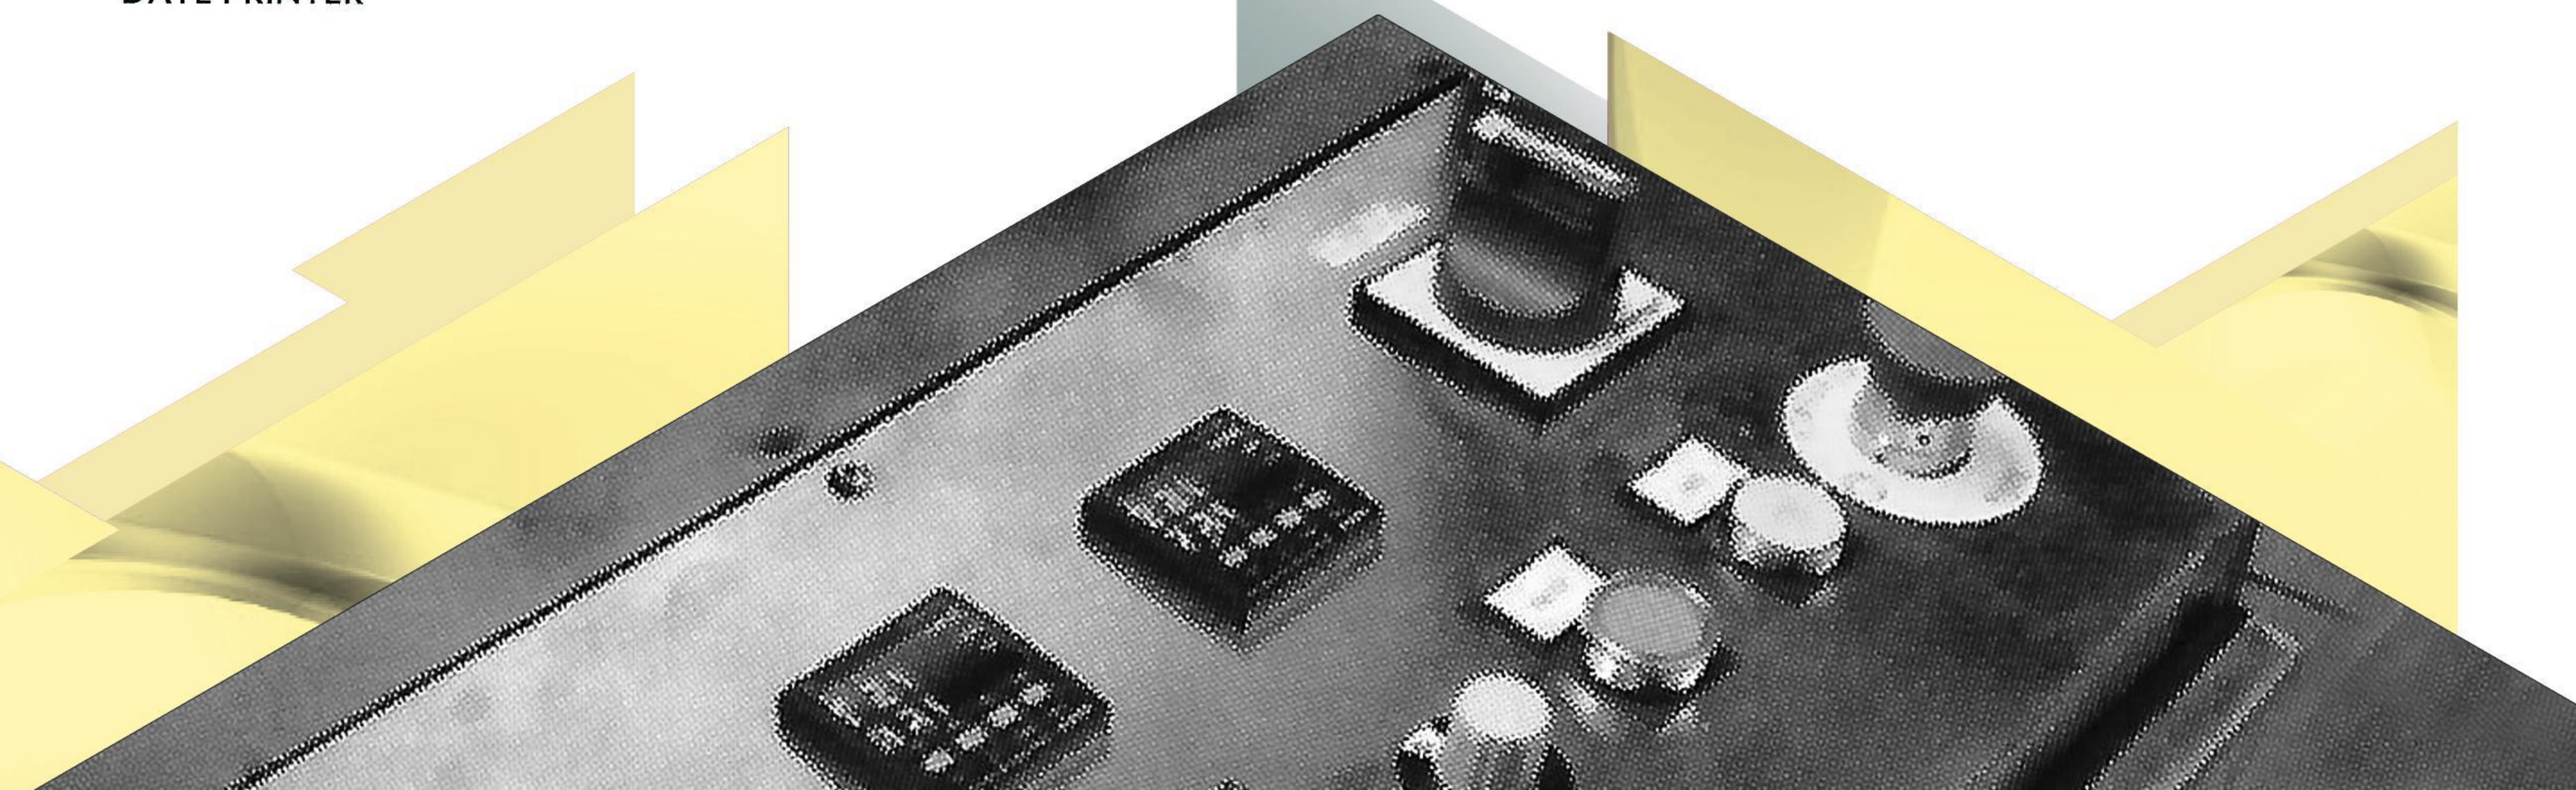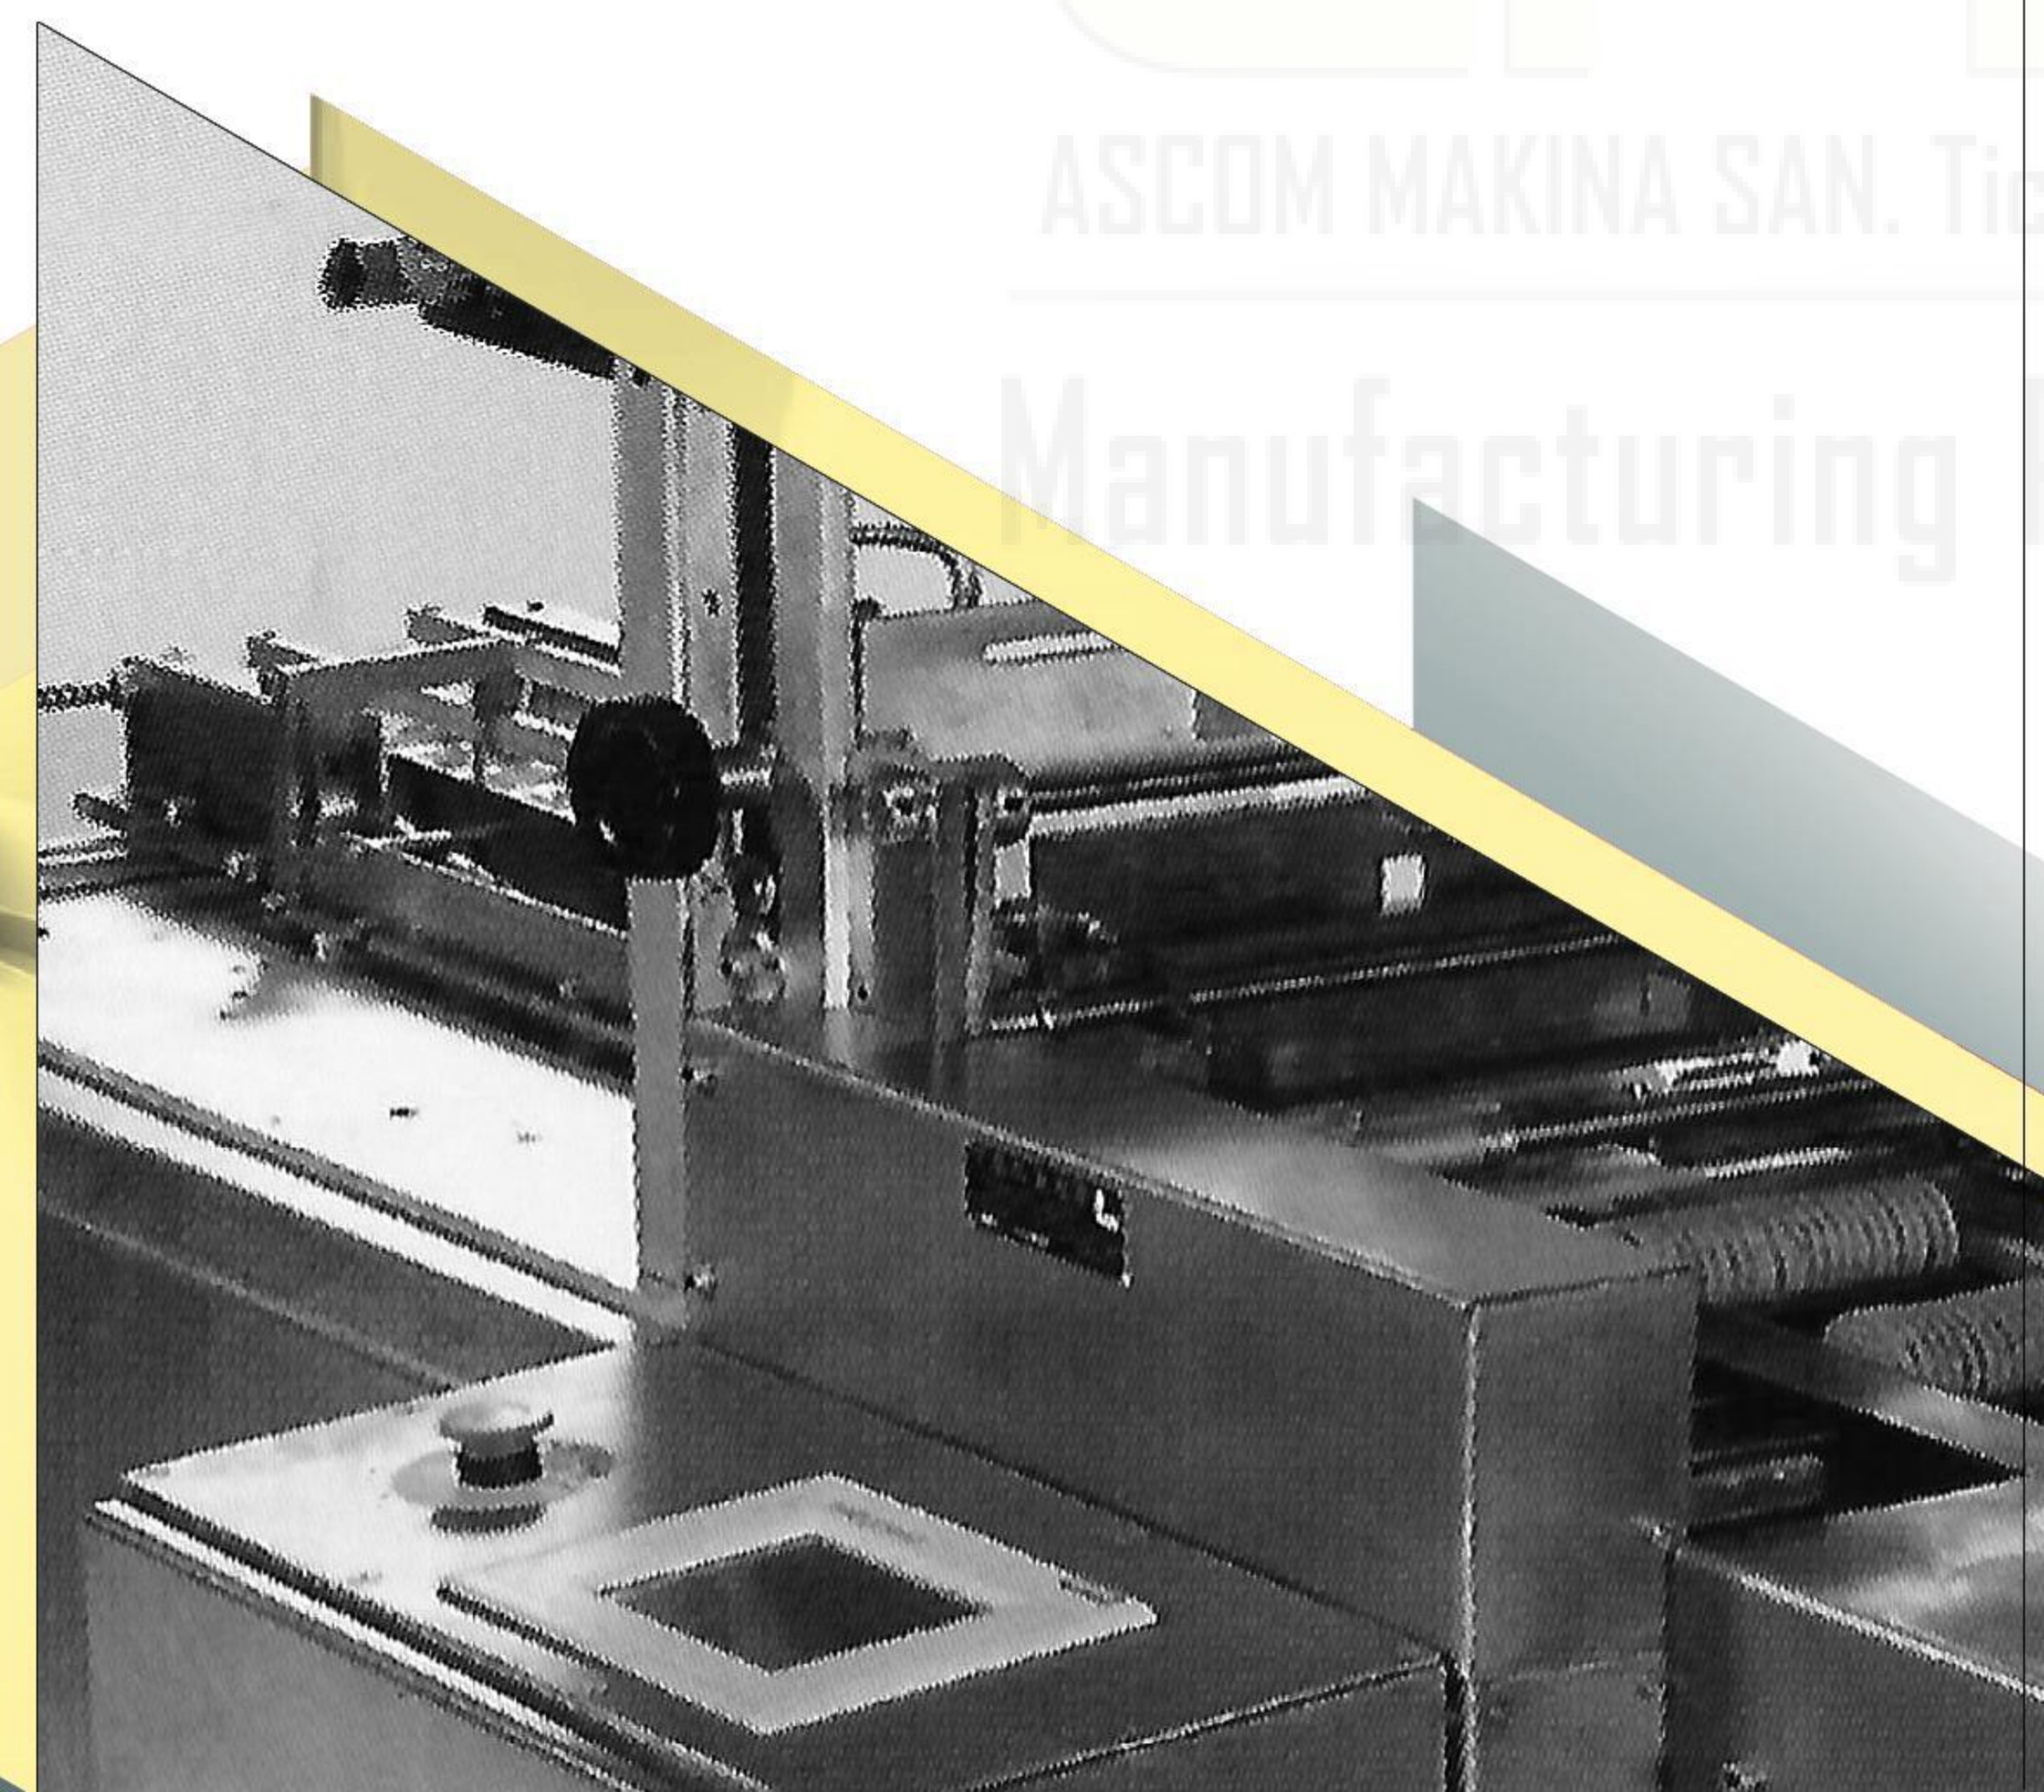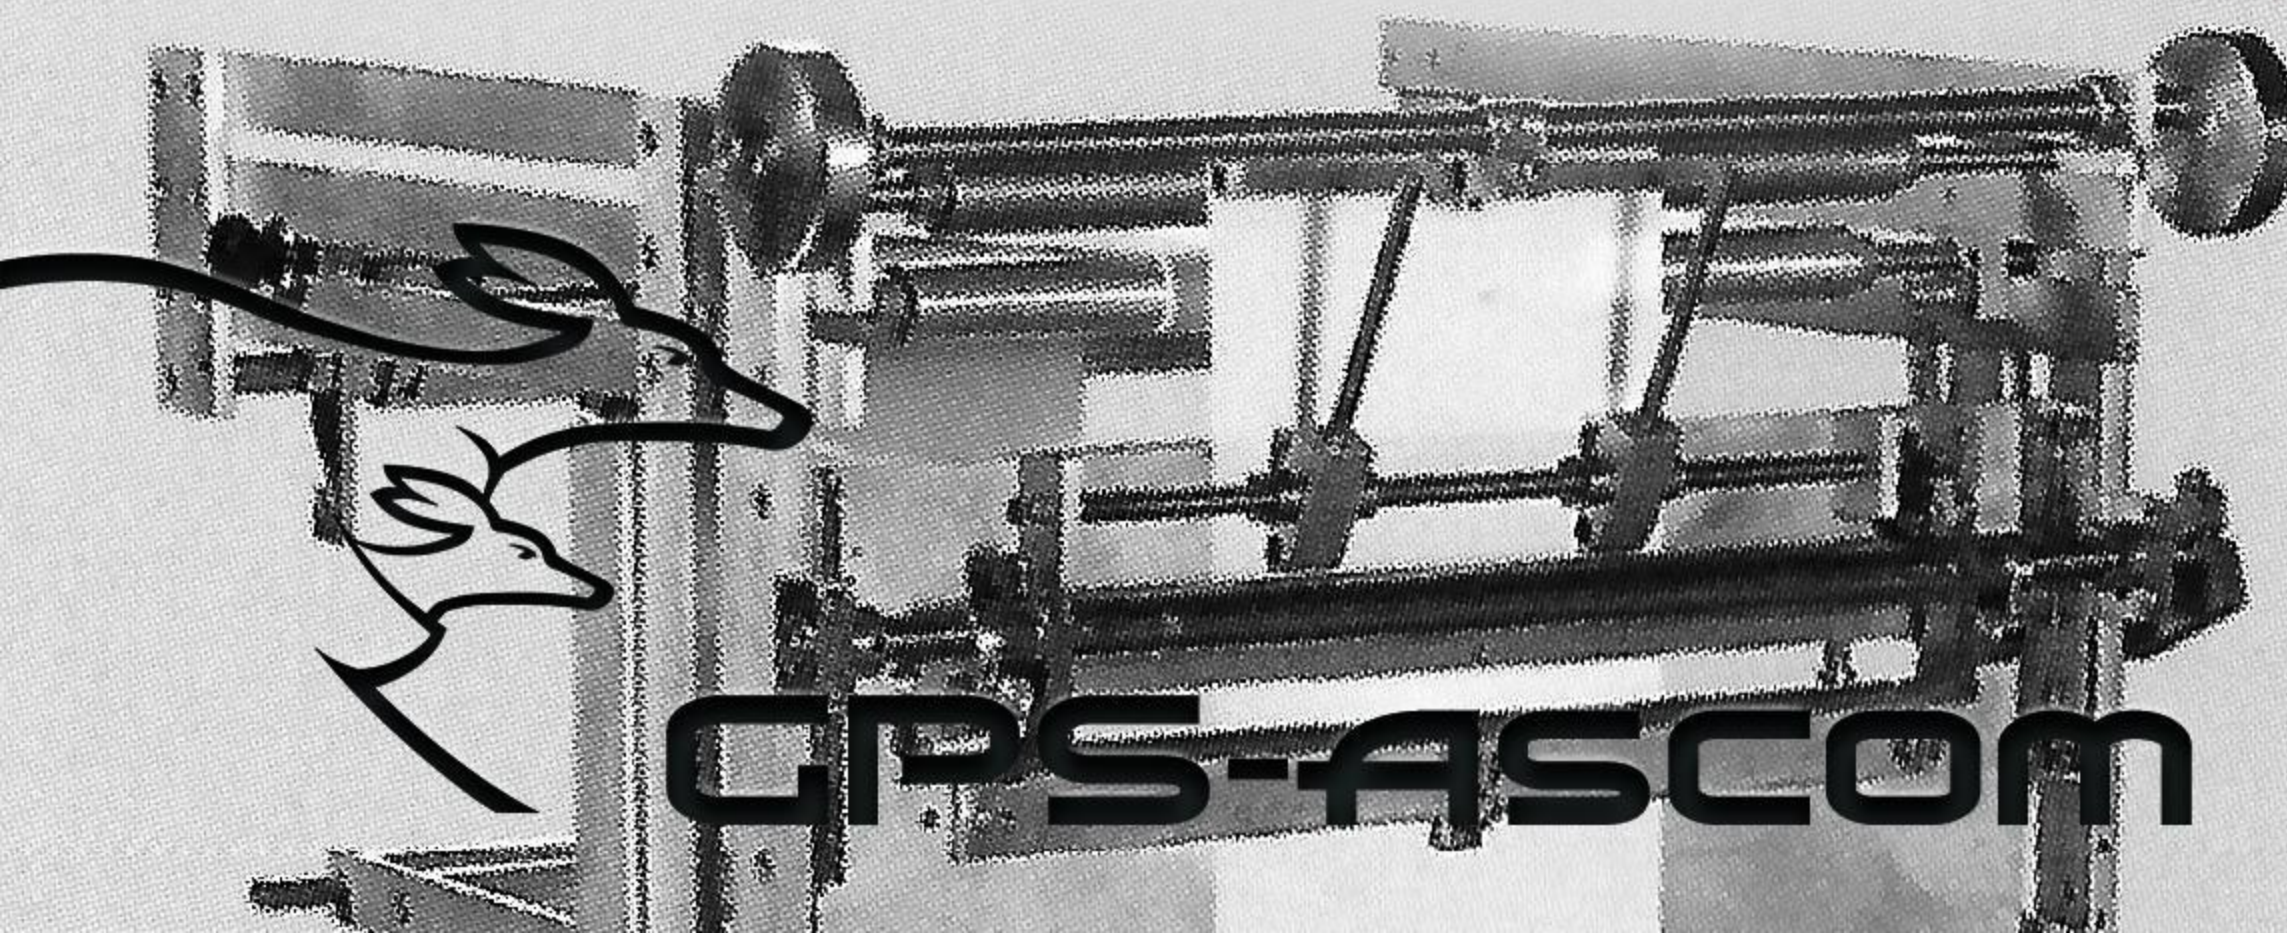

GPS  
ASCOM MAKINA SAN. Tic. Ltd. Sti  
Manufacturing Production Lines